
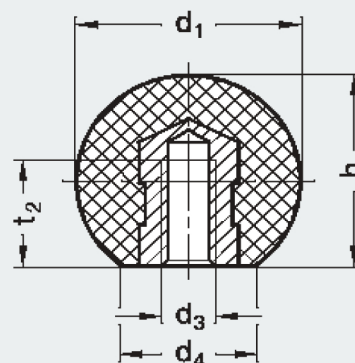


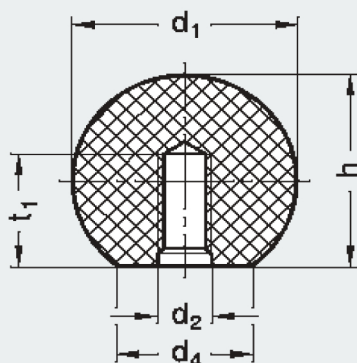

Type C with tapped hole (no bush)

Type E with tapped bush

d ₁	Plastic KU Type C Thread				KT Type C Thread				d ₃ Plastic KU Type E Thread	KT Type E Thread	d ₄ ≈	h	t ₁ min.	t ₂ min.
12	M 4	—	—	—	—	—	—	—	—	—	6	11,2	6,5	—
16	M 4	M 5	—	—	M 4	M 5	—	—	—	—	8	15	7	6
20	M 5	M 6	—	—	M 5	M 6	—	—	M 5	—	12	18	9	7,5
25	M 5	M 6	M 8	—	M 6	M 8	—	—	M 6	M 6	15	22,5	11	9
30	M 8	—	—	—	—	—	—	—	—	—	15	28	14,5	—
32	M 6	M 8	M 10	—	M 8	M 10	—	—	M 8	M 8	18	29	14,5	12
35	M 10	—	—	—	—	—	—	—	—	—	18	32,5	18	—
40	M 8	M 10	M 12	—	M 10	M 12	—	—	M 10	—	22	37	18	15
50	M 12	—	—	—	—	—	—	—	M 12	—	27	46	21	18

Specification

Plastic KU
Duroplast (Phenolic PF)

black (red optional,
specify 'red' on order;
not for all types)

Flash removed and polished

Bush (Type E)
steel, zinc plated or brass (MS)
(if "brass" is desired add "MS" on
order code)

Plastic KT
Technopolymer (Polyamide PA)
shock resistant

black, matt finish

Insert (Type E)
steel, zinc plated

Information

Photo

Ball knobs (Press on type)
DIN 319 Type L and M

Gear lever handles GN 310

How to order

Ball knob
DIN 319-KT-25-M6-E

Code No.	Material	d ₁	d ₂ (d ₃)	Type