




Threaded Insert

Material: Low Carbon Steel

FINISH: ZINC CLEAR CR III
FULL HEX FLAT HEAD TYPE:

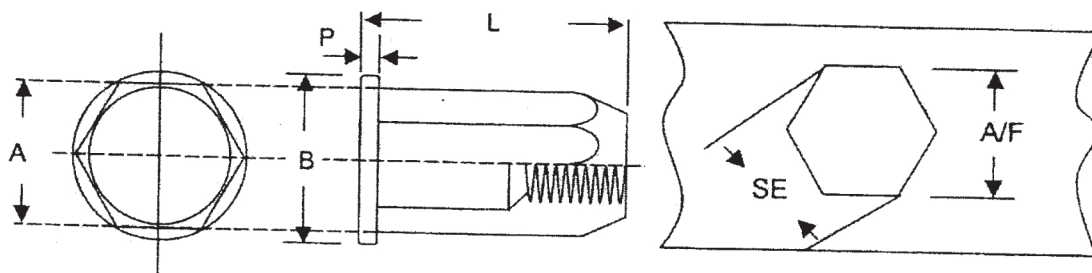


METRIC DIMENSION (mm)

Thread size	Part Number	A -0.2	B ±0.30	GRIP RANGE	L ±0.30	P ±0.1	SE Min.	HEX HOLE A/F (+0.2)
M4 x 0.7	HH-LM4	6.0	9.0	0.5 - 2.5	11.2	0.8	6.8	6.1
M5 x 0.8	HH-LM5	7.0	10.0	0.5 - 3.0	13.0	1.0	8.0	7.1
M6 x 1.0	HH-LM6	9.0	13.0	0.5 - 3.0	16.0	1.5	10.3	9.1
M8 x 1.25	HH-LM8	11.0	16.0	0.5 - 3.0	18.0	1.5	12.6	11.1
M10 x 1.5	HH-LM10	13.0	19.0	1.0 - 4.5	24.0	2.0	14.9	13.1
M12 x 1.75	HH-LM12	16.0	23.0	1.5 - 5.0	27.0	2.0	18.3	16.1

FINISH: ZINC CLEAR CR III

FULL HEX FLUSH HEAD TYPE:

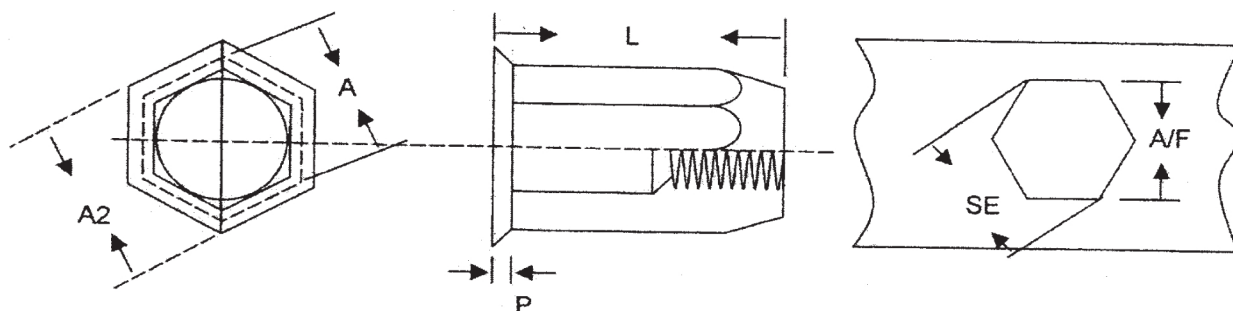

METRIC DIMENSION (mm)

Thread size	Part Number	A -0.2	A2 ±0.30	GRIP RANGE	L +0.5/-0.3	P ±0.2	SE Min.	HEX HOLE A/F (+0.1)
M4 x 0.7	HH-SM4	6.0	7.00	0.5 - 2.5	10.0	0.5	6.8	6.1
M5 x 0.8	HH-SM5	7.0	8.00	0.5 - 3.0	12.0	0.6	8.0	7.1
M6 x 1.0	HH-SM6	9.0	10.00	0.6 - 3.0	15.0	0.6	10.3	9.1
M8 x 1.25	HH-SM8	11.0	12.00	0.7 - 4.0	17.5	0.5	12.6	11.1
M10 x 1.5	HH-SM10	13.0	14.50	0.8 - 4.5	23.0	1.0	14.9	13.1
M12 x 1.75	HH-SM12	16.0	18.25	1.0 - 5.0	25.0	1.0	18.3	16.1