



- Available in zinc plated steel and stainless steel
- Ten Head style
- Many stud lengths available to meet your application requirement
- Refer ordering chart for finish type

* To purchase stainless steel studs change the last two digits of the part number from - 16 to -20. Ex: 85-11-100-16 become 85-11-100-20






Oval Slotted

Wing Head

Hex Socket

Bail Style RB

Bail Style RA

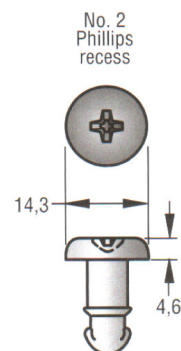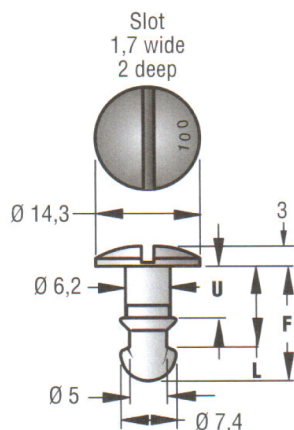

P/No:85-35-308-55
P/No:85-35-313-55

P/No:85-35-311-55


southco®

				For: ALL OTHER RECEPTACLES		Stud Part Number				
Outer Panel Thk.		Outer Panel Thk.		Outer Panel Thk.		Zinc plate,chromate plus sealer				Zinc plated plus brigh chromate dip
Min	Max	Min	Max	Min	Max	Oval Slotted	Wing Head	Bail Style RB	Bail Style RA	Phillips recess
----	----	----	----	2.3	2.8	85-11-100-16	85-12-100-16	85-16-100-16	85-15-100-16	85-P-100
----	----	----	----	2.8	3.3	85-11-120-16	85-12-120-16	85-16-120-16	85-15-120-16	85-P-120
----	----	----	----	3.3	3.8	85-11-140-16	85-12-140-16	85-16-140-16	85-15-140-16	85-P-140
----	----	----	----	3.8	4.3	85-11-160-16	85-12-160-16	85-16-160-16	85-15-160-16	85-P-160
----	----	----	----	4.3	4.8	85-11-180-16	85-12-180-16	85-16-180-16	85-15-180-16	85-P-180
----	----	----	----	4.8	5.3	85-11-200-16	85-12-200-16	85-16-200-16	85-15-200-16	85-P-200
----	----	----	----	5.3	5.8	85-11-220-16	85-12-220-16	85-16-220-16	85-15-220-16	85-P-220
----	----	1.3	1.8	5.8	6.3	85-11-240-16	85-12-240-16	85-16-240-16	85-15-240-16	85-P-240
0.4	0.9	1.8	2.3	6.4	6.9	85-11-260-16	85-12-260-16	85-16-260-16	85-15-260-16	85-P-260
0.9	1.4	2.3	2.8	6.9	7.4	85-11-280-16	85-12-280-16	85-16-280-16	85-15-280-16	85-P-280
1.4	1.9	2.8	3.3	7.4	7.9	85-11-300-16	85-12-300-16	85-16-300-16	85-15-300-16	85-P-300
1.9	2.4	3.3	3.8	7.9	8.4	85-11-320-16	85-12-320-16	85-16-320-16	85-15-320-16	85-P-320
2.4	2.9	3.8	4.3	8.4	8.9	85-11-340-16	85-12-340-16	85-16-340-16	85-15-340-16	85-P-340
2.9	3.4	4.3	4.8	8.9	9.4	85-11-360-16	85-12-360-16	85-16-360-16	85-15-360-16	85-P-360
3.4	3.9	4.8	5.3	9.4	9.9	85-11-380-16	85-12-380-16	85-16-380-16	85-15-380-16	85-P-380
3.9	4.4	5.3	5.8	9.9	10.4	85-11-400-16	85-12-400-16	85-16-400-16	85-15-400-16	85-P-400
4.4	4.9	5.8	6.3	10.4	10.9	85-11-420-16	85-12-420-16	85-16-420-16	85-15-420-16	85-P-420
5	5.5	6.4	6.9	10.9	11.4	85-11-440-16	85-12-440-16	85-16-440-16	85-15-440-16	85-P-440
5.5	6	6.9	7.4	11.4	11.9	85-11-460-16	85-12-460-16	85-16-460-16	85-15-460-16	85-P-460
6	6.5	7.4	7.9	11.9	12.4	85-11-480-16	85-12-480-16	85-16-480-16	85-15-480-16	85-P-480
6.5	7	7.9	8.4	12.5	13.0	85-11-500-16	85-12-500-16	85-16-500-16	85-15-500-16	85-P-500
7	7.5	8.4	8.9	13	13.5	85-11-520-16	85-12-520-16	85-16-520-16	85-15-520-16	85-P-520
7.5	8	8.9	9.4	13.5	14.0	85-11-540-16	85-12-540-16	85-16-540-16	85-15-540-16	85-P-540
8	8.5	9.4	9.9	14	14.5	85-11-560-16	85-12-560-16	85-16-560-16	85-15-560-16	85-P-560
8.5	9	9.9	10.4	14.5	15	85-11-580-16	85-12-580-16	85-16-580-16	85-15-580-16	85-P-580

* Please check for any special conditions, or constant required by your specific receptacle on the receptacle description pages.



Large Quarter-Turn Stud

Knurled Head



Toolhead Recess

Hex Socket 4 mm 5/32 hex socket

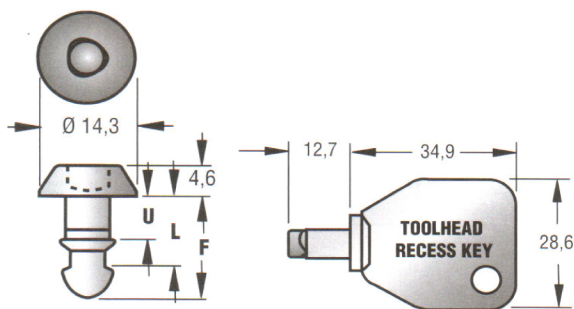


STUD PART NUMBERS

Dimension

Zinc plate, chromate plus sealer		Zinc plate, plus bright chromate dip			
Knurled Head	Hex Socket	Toolhead Recess	U	L	F
85-13-100-16	85-78-100-16	85-T-100	5.2	9.1	13.8
85-13-120-16	85-78-120-16	85-T-120	5.7	9.7	14.4
85-13-140-16	85-78-140-16	85-T-140	6.2	10.2	14.9
85-13-160-16	85-78-160-16	85-T-160	6.7	10.7	15.4
85-13-180-16	85-78-180-16	85-T-180	7.2	11.2	15.9
85-13-200-16	85-78-200-16	85-T-200	7.8	11.7	16.4
85-13-220-16	85-78-220-16	85-T-220	8.3	12.2	16.9
85-13-240-16	85-78-240-16	85-T-240	8.8	12.7	17.4
85-13-260-16	85-78-260-16	85-T-260	9.3	13.2	17.9
85-13-280-16	85-78-280-16	85-T-280	9.8	13.7	18.4
85-13-300-16	85-78-300-16	85-T-300	10.3	14.2	18.9
85-13-320-16	85-78-320-16	85-T-320	10.8	14.7	19.4
85-13-340-16	85-78-340-16	85-T-340	11.3	15.2	19.9
85-13-360-16	85-78-360-16	85-T-360	11.8	15.8	20.5
85-13-380-16	85-78-380-16	85-T-380	12.3	16.3	21
85-13-400-16	85-78-400-16	85-T-400	12.8	16.8	21.5
85-13-420-16	85-78-420-16	85-T-420	13.3	17.3	22
85-13-440-16	85-78-440-16	85-T-440	13.8	17.8	22.5
85-13-460-16	85-78-460-16	85-T-460	14.4	18.3	23
85-13-480-16	85-78-480-16	85-T-480	14.9	18.8	23.5
85-13-500-16	85-78-500-16	85-T-500	15.4	19.3	24
85-13-520-16	85-78-520-16	85-T-520	15.9	19.8	24.5
85-13-540-16	85-78-540-16	85-T-540	16.4	20.3	25
85-13-560-16	85-78-560-16	85-T-560	16.9	20.8	25.5
85-13-580-16	85-78-580-16	85-T-580	17.4	21.3	26

Large Split Ring Retainer, Push-On Style

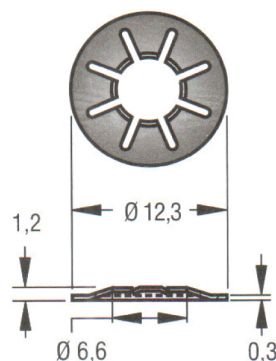


P/No:85-34-201-20

- Material: 302 Stainless Steel passivated.
- For installation tool order P/No: 85-0-22543-11




Large Nylon Retainer, Push-On Style




P/No: 85-34-301-12

- Material: Nylon, Black
- For installation tool order P/No: 85-0-22543-11




Installation Tool

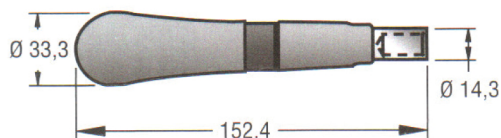

P/No: 85-0-22543-11

Large Neoprene Retainer



P/No: 85-33-101-27

- Material: Neoprene, black
- Hand installation

