



Flexible Draw Latches


Flexible Draw Latch, T-handle Style



- Non-corrosive, non-conductive, UV-resistant materials
- Two sizes available
- Absorbs and reduces vibration
- UL94-HB flammability rating
- Concealed or front mounting options
- Black thermoplastic elastomer handle
- Black glass reinforced nylon keeper and bracket

DIMENSIONS				Mounting method	PART NUMBERS
A	B	C	D		
122	41	25,4	31	Concealed (10-24 Thd)	F7-51
				Concealed (M5 Thd)	F7-52
				Front	F7-53
221	117	32	29	Concealed (10-24 Thd)	F7-71
				Concealed (M5 Thd)	F7-72
				Front	F7-73

Steady state clamp force vs. mounting dimension (21°C)

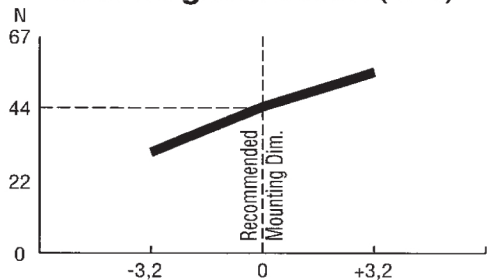

Variation from recommended mounting dimension (Distance between bracket and keeper mounting holes).

