



Lever-Assisted Aerolatch®

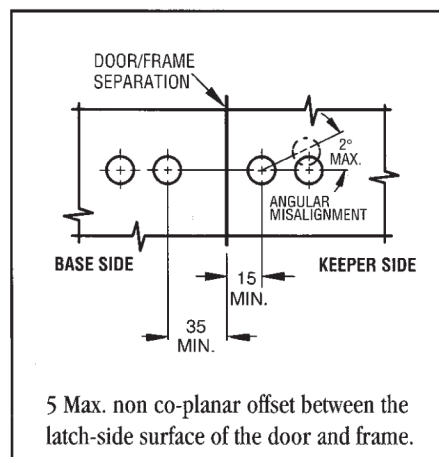

- Flexible, over-center latching action
- Heavy duty construction
- Two sizes available
- Absorbs and reduces vibration
- Black urethane rubber body
- Latch and keeper available in bright zinc finish or Type 302 stainless steel

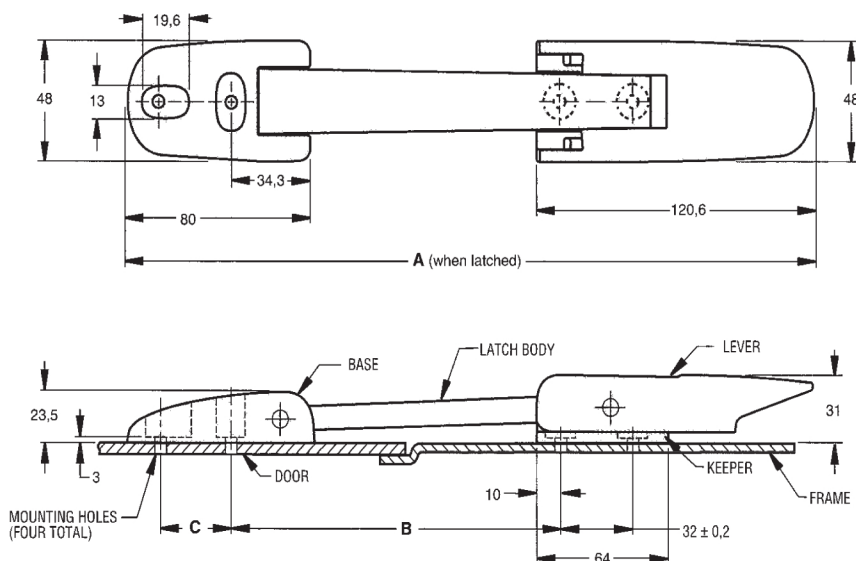

Dimension			Part Number	Mounting Hole Size	Pan or Round Head Screw Size
A	B	C			
Medium Duty					
254	97±0.3	25.4	37-30-294-60	Ø5.5 ±0.1	M5 (No.10)
379	222±6		37-30-297-60		
Heavy Duty					
300	144±4	32	37-40-295-60	Ø6.6 ±0.1	M6 (1/4-20)

To operate latch

1. Align lever over keeper positioning pivot bosses (A) in slots (B) of keeper.

2. Rotate lever until latching rib (C) locks in detent (D).

3. To unlatch, lift lever firmly to overcome detent then rotate to disengage keeper.

