



Window seals are used to mount panes, windows, etc. in doors, casings and machine enclosures.




- They are made of EPDM with a hardness of 80° Shore A.
The pane is mounted by simply pressing it into the window seal.
- Additional tools are not required. The pane is inside or outside the enclosure and hence is well-suited for use under high pressure conditions.

Tolerances:

- EPDM: DIN 7715 E2

Material:-

- rubber quality: EPDM NBR is oil-resistant

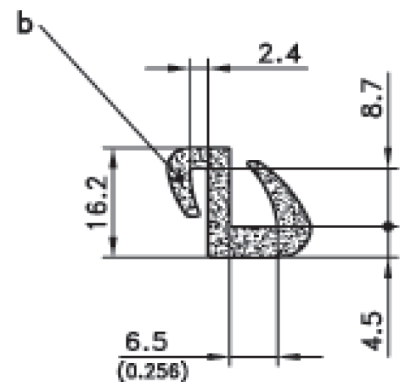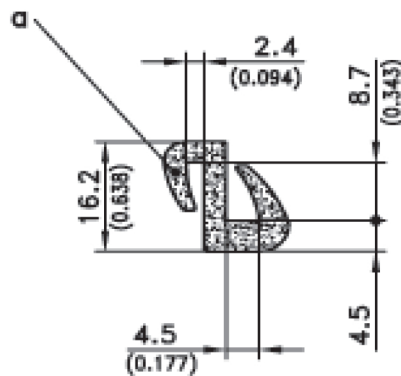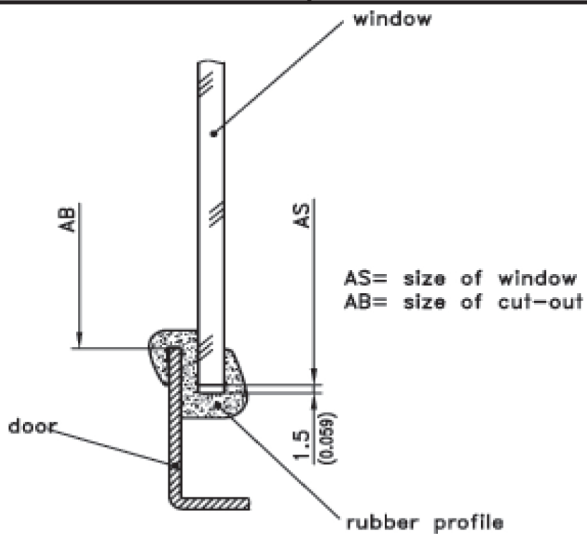

Packaging

	colour	bending radius	unit	material	Part No.
a)	black	min. 40mm	100m	rubber/EPDM	209-0401
				NBR	209-0406
b)	black	min. 40mm	100m	rubber/EPDM	209-0402
				NBR	209-0407

$$A B = A S - 14.5 / 0.571$$