

Bridge Handle




Polyamide handle, two sizes.

- Fastening with cap screws or hexagon head screws (version a) or with countersunk head screws (version a₁)

Material:- a) and a₁)

- PA, Black

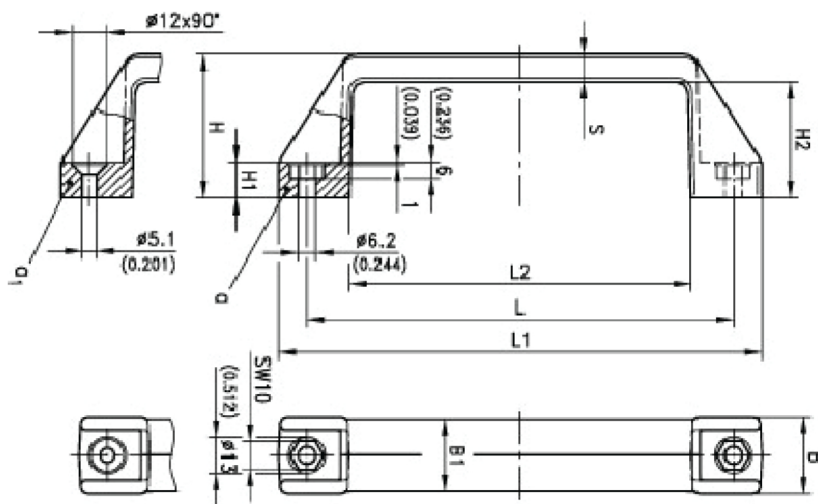

version a)		with hexagon socket M6							
L	L1	L2	B	B1	H	H1	H2	S	Part No.
122/4.803	142/5.591	98/3.858	26/1.024	24/0.945	40/1.575	12/0.472	32/1.260	8/0.315	213-0201.03

version a ₁) with countersunk				M5					
L	L1	L2	B	B1	H	H1	H2	S	Part No.
122/4.803	142/5.591	98/3.858	26/1.024	24/0.945	40/1.575	12/0.472	32/1.260	8/0.315	213-0202.03

version a)		with hexagon socket M6							
L	L1	L2	B	B1	H	H1	H2	S	Part No.
150/5.906	170/6.693	120/4.724	28/1.102	26/1.024	52/2.047	13/0.512	42/1.654	10/0.394	213-0203.03

version a ₁) with countersunk				M5					
L	L1	L2	B	B1	H	H1	H2	S	Part No.
150/5.906	170/6.693	120/4.724	28/1.102	26/1.024	52/2.047	13/0.512	42/1.654	10/0.394	213-0204.03