




Screw-on Hinge for aluminium profiles, lift-off



- These hinges allow the linking of different profile widths
- Parallel and perpendicular mounting of profiles possible
- The tenon blocks fit into the recess at the back of the hinges combine positioning, fastening and anti-rotation features.
- For application with non tenon blocks or on flat surface (e.g. sheet metal, glass), the corresponding fastening blocks are available with the safety device preventing rotation.

Material:-


- Hinge housing: zinc die, chrome plated or black coated
- Pin: stainless steel
- Tenon blocks and fastening blocks: zinc die, untreated

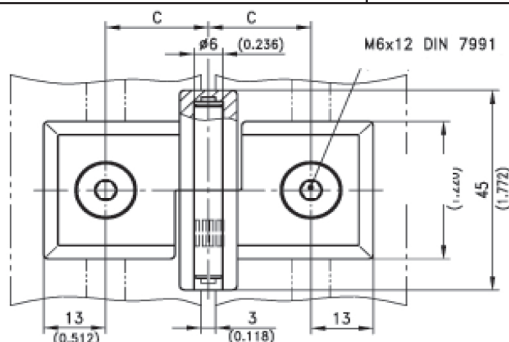




Dim.C	Profile width
16.5	30
19.0	35
21.5	40
24.0	45
26.5	50

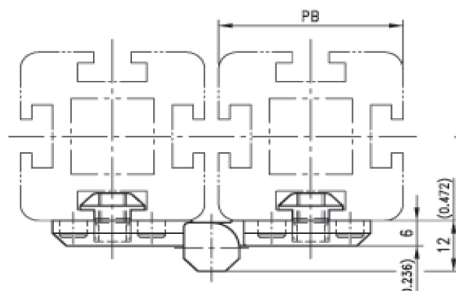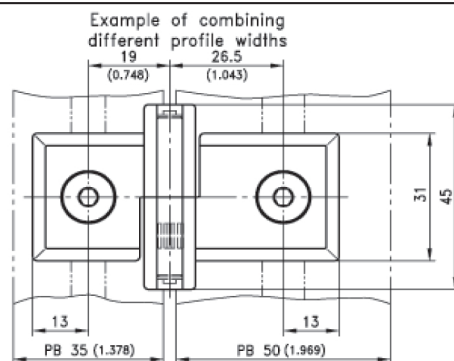

Tenon blocks
for positioning and fastening

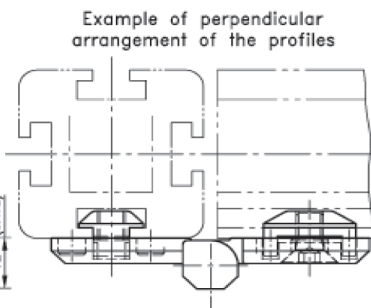

Fastening/Positioning blocks
for application
with non DIRAK
tenon blocks

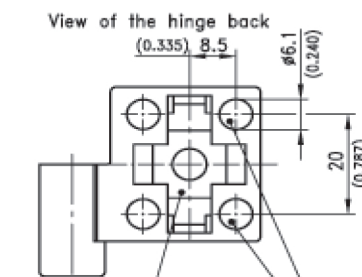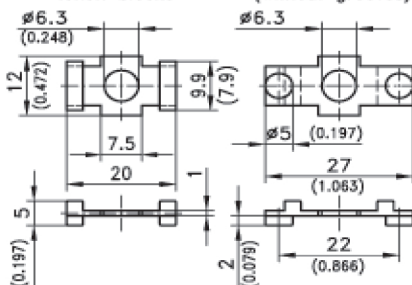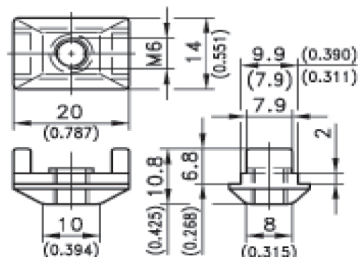

recess for tenon blocks
or fastening blocks

2 holes for standard dowel
pins against rotation

Tenon Block

groove width in profile	P/No.
8mm	265-1001
10mm	265-1002

Fastening / Positioning blocks

for application with non-tenon block	P/No.
groove width 8mm	265-1101
groove width 10mm	265-1102

Version	Part number for profile width PB					
surface	door version	30	35	40	45	50
chrome plated	RH	265-9001	265-9101	265-9201	265-9301	265-9401
	LH	265-9003	265-9103	265-9203	265-9303	265-9403
block coated	RH	265-9002	265-9102	265-9202	265-9302	265-9402
	LH	265-9004	265-9104	265-9204	265-9304	265-9404