



Screw-on Hinge with or without grounding/earthing device for heavy duty

- RH and LH application
- opening angle min 180°, with version b) 270°
- Combination of version a) and b) on request
- screw-distance allows for easier fitting

Material:-

- Hinge parts: zinc die, chrome plated or black coated
- Pivot pin and molded in screw: stainless steel to a₁)
- Pin: steel, zinc plated
- Grounding/earthing washer: steel, zinc plated
- Spring: spring steel

	Chrome plated	Black coated
a) Hinge with screw M8 moulded	218-9201	218-9202
b) Hinge with countersunk M8	218-9203	218-9204
** Hinge with countersunk M8 (stainless steel P/No: 218-9303)		

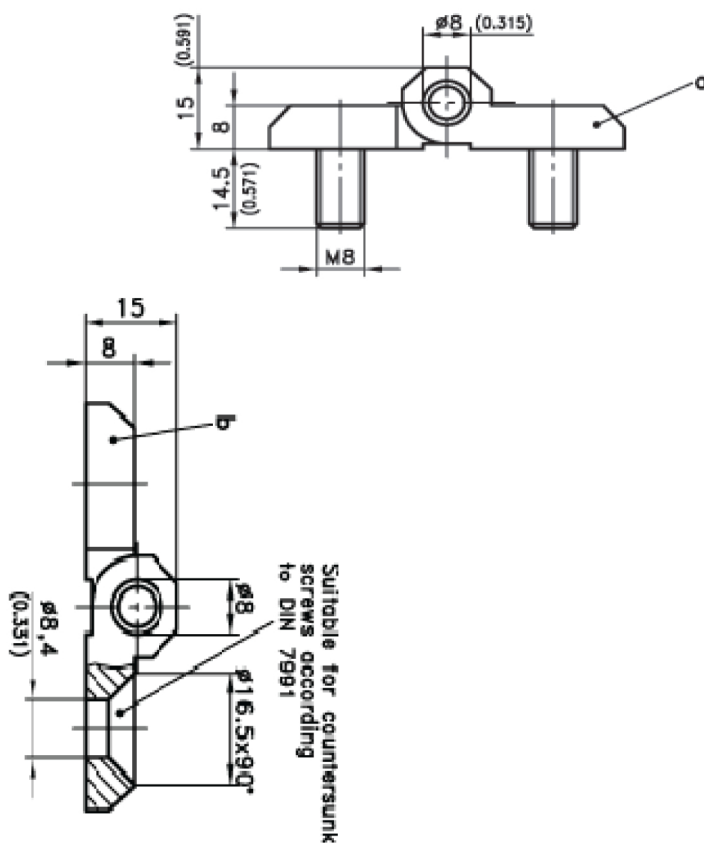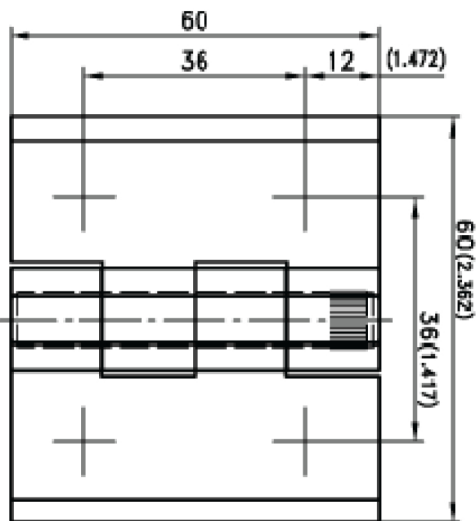

grounding/earthing version

