


Screw-on Hinge RH & LH application:-

- Opening angle min. 180° at version b) 270°

Material:-

- Hinge parts: zinc die, chrome plated or black coated.
- Pin: steel, zinc plated
- Grounding/earthing washer: steel, zinc plated
- Spring: Spring steel

	Chrome plated	Black coated	Stainless steel
a) Hinge with screw M6 molded in	218-9101	218-9102	-
b) Hinge with countersunk holes M6	218-9103	218-9104	218-9302

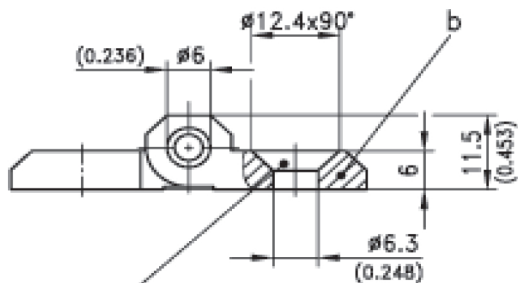

Suitable for countersunk screws according to DIN 7991

