





Screw-on Hinge for RH and LH application

- Opening angle min. 180° with version b) 270°

Material:-

- Hinge parts: zinc die, chrome plated or black coated
- Pivot pin and molded in screw: stainless steel to a₁)
- Pin: steel, zinc plated
- Grounding/earthing washer: steel, zinc plated
- Spring: spring steel

	Chrome plated	Black coated
a) Hinge with screw M5 moulded	218-9001	218-9002
b) Hinge with countersunk M5	218-9003	218-9004
** Hinge with countersunk M5 (stainless steel P/No: 218-9301)		

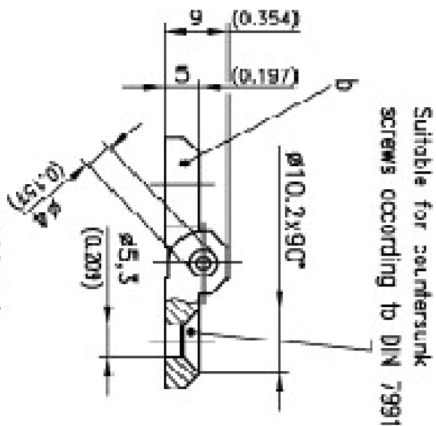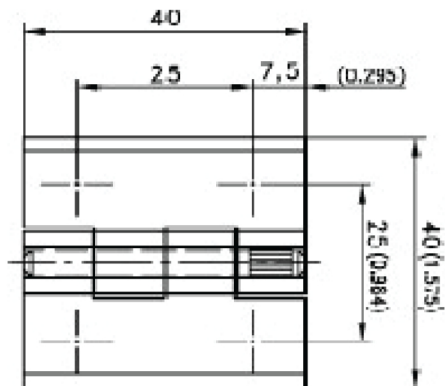

grounding / earthed version

