



Concealed Hinge for surface mounted doors.

Heavy duty version

- For application with Rod-Latch system
- The Opening angle 120°
- RH or LH application


Material:-

- a) a₁) and a₂)
- Frame parts: Steel, zinc plated
 - Door parts: Steel, untreated
 - Pins: Steel, zinc plated for a₁) in addition
 - Fastening washer: Steel, zinc plated
- b) b₁) and b₂)
- all parts steel, zinc plated

P/No.: 243-9104 (Steel)

P/No.: 243-9204 (Stainless Steel)

Door part weld-on or fixed with studs.
Oblong holes in door part allow
screw or rivet fitting to doors out of
synthetic material, as well.

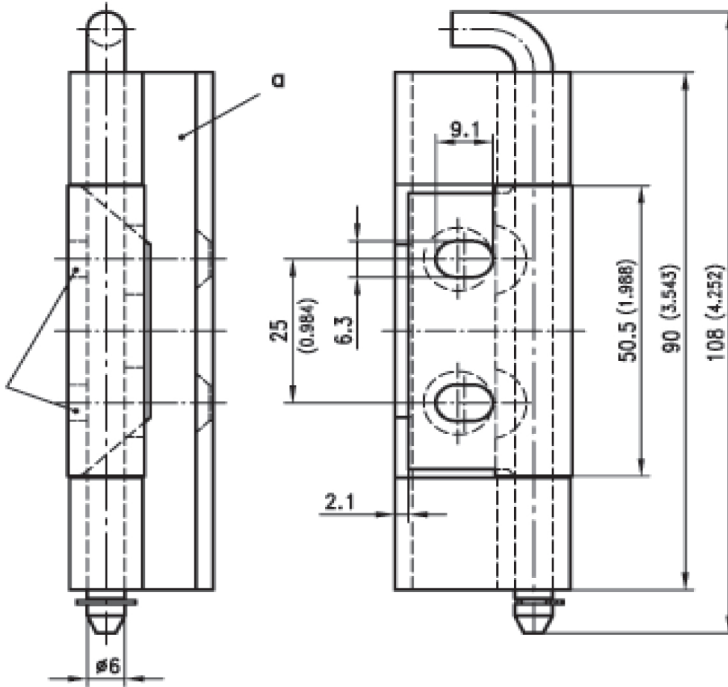

fixing washer for
holes □8 or □10
(□0.315 or □0.394)

