





Door-Positioning Spring

Lightweight sizes

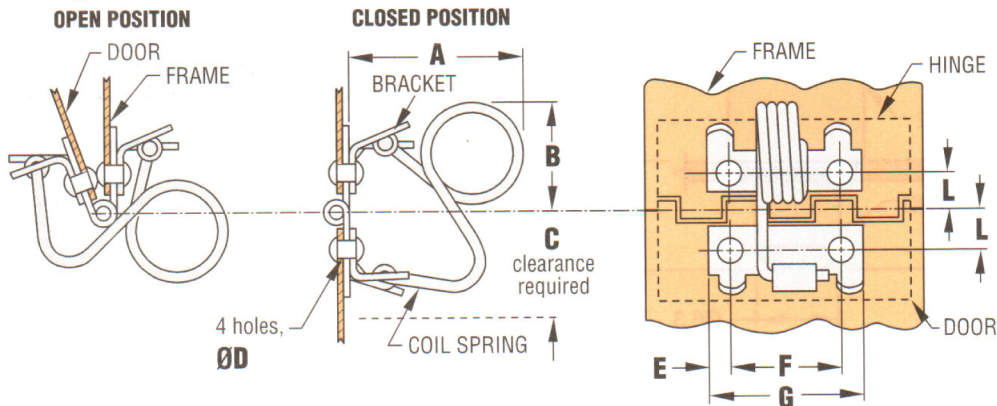

P/No:23-10-051-11

P/No:23-10-071-11

southco®

- Hold door open or closed under spring tension
- Used with continuous hinges

- Spring steel hinge
- Zinc plated with chromate plus sealer



Part Numbers	series No	Maximum operating Torque Nm (in.lbs.)	Dimensions							
			A	B	C	D	E	F	G	L
23-10-051-11	50	0.62 (5.5)	25.5	24	19	3.6	4	15.9	24	6.4
23-10-071-11	70	0.85 (7.5)	36.5	30.2	25.5	4.3	5.6	22.2	33.3	8.7

Heavyweight Size Door-Positioning Spring

- 2 Nm (17.5 in. - lbs.) maximum operating torque
- Holds door open or closed under spring tension

- Used with continuous hinges
- Zinc plated with chromate plus sealer

Heavyweight size

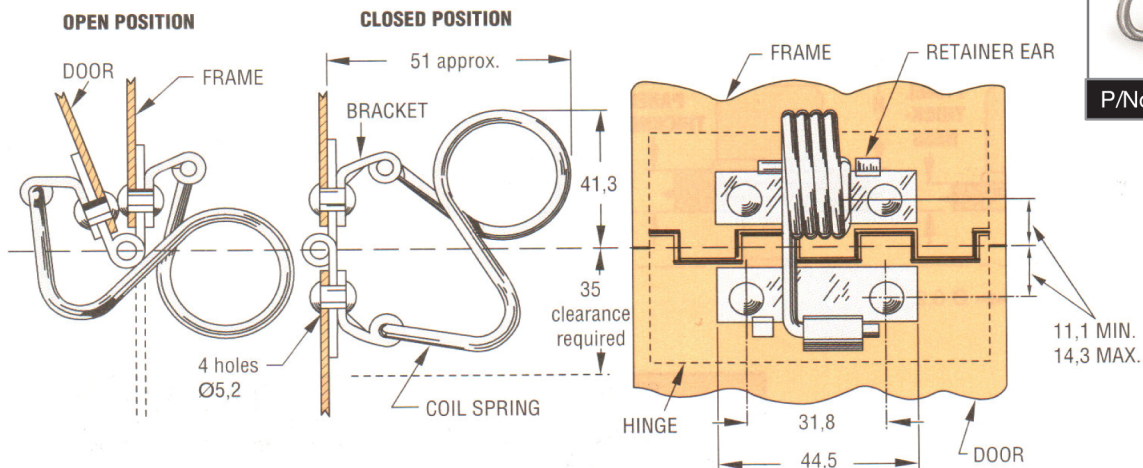

P/No:23-10-11-12

southco®