

Pawl / Cam Action

PAGE


Handle Style Swell Latch, Small and Large



- Latches in any frame thickness, blind application. glass or plastic
- Accommodates misalignment between door and frame Custom colours on special order, send your
- colour chip or call for details

Resists vibration

- Black nylon handle with black SBR rubber bushing
- To order optional side mount bracket for P/N:19-81-10 order part: 19-0-15666-11
- P/N:19-91-10 order part: 19-0-10665-11

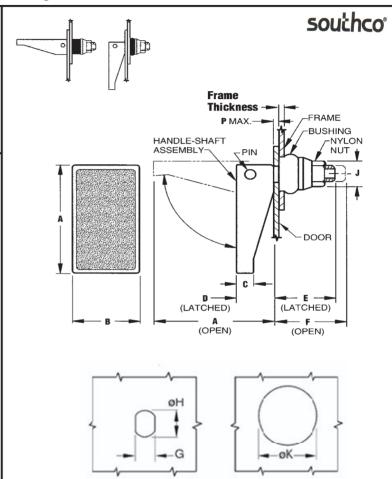

| | | | | | | J | Р | G | ØН | | Øk | Max. | rated | thread | |
|----|----|---|------|----|------|----------|-----|------|------|------------|------|--------------------|--------------|---------|-----------------------|
| Α | В | С | D | Е | F | ((across | Max | +0.1 | +0.1 | Frame | +0.5 | misalignment | Load | size | part number |
| | | | | | | flats) | | -0.0 | -0.0 | Thickness | -0.0 | between panel hole | (short team) | | |
| | | | | | | | | | | | | and frame hole | | | |
| 28 | 12 | 4 | 8 | 13 | 15.5 | 6 | 3.2 | 3.3 | 4.1 | 3.2 MAX | 9.5 | 0.4 | 180 N | 8-32UNC | 19-81-10 small |
| 39 | 17 | 5 | 11.5 | 19 | 22.5 | 8 | 4.8 | 4.5 | 5.8 | up tp 3.2 | 13.5 | 0.6 | 440 N | 12-24 | 19-91-10 |
| | | | | | | | | | | 3.2 to 4.8 | 14 | 0.8 | 330 N | UNC | Large |

* Latch should not be loaded continuously at values near the short term rated load.