


Hidden Panel-Latching System For Remote Latching

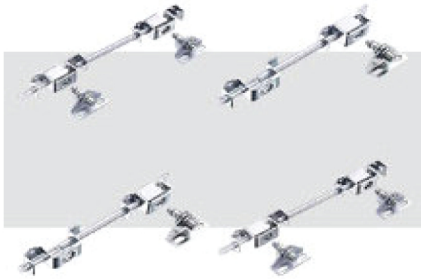


- Push to close, push the button to open
- For remote latching
- Floating and fixed keeper styles
- Floating keeper accommodates hinged panels
- Fixed keeper accommodates lift-off panels
- 1010 steel latch, bracket, and keeper bracket
- 1010 case hardened steel latch plate and stud
- White thermoplastic polyester latch guide, receiver cup and actuator button
- UL 94-V-O flammability rating

Assembly Part Number

Remote fixed keepers	E2-1-XXXX-1
Remote floating keepers	E2-1-XXXX-2

XXXX EQUALS ROD LENGTH IN MILLIMETERS


Fixed keeper for lift-off panels

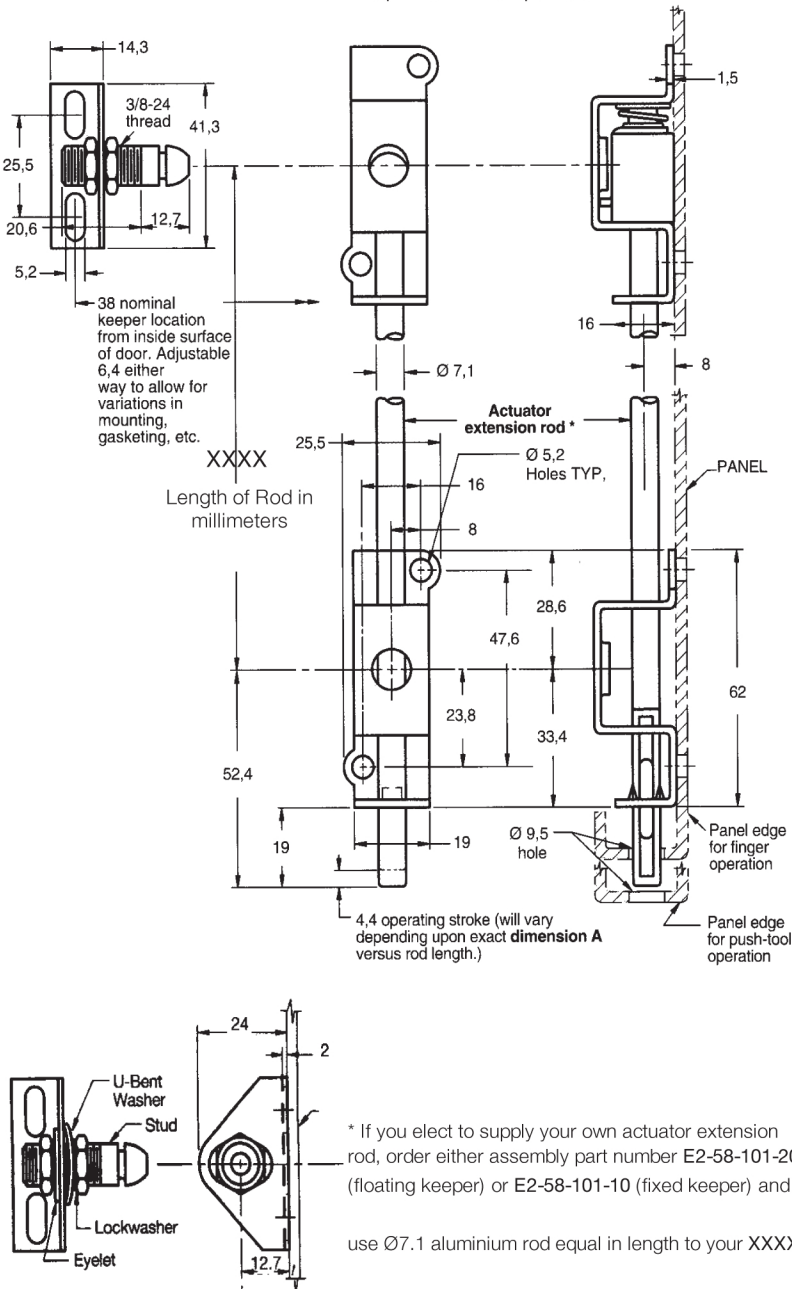


* If you elect to supply your own actuator extension rod, order either assembly part number E2-58-101-20 (floating keeper) or E2-58-101-10 (fixed keeper) and use Ø7.1 aluminium rod equal in length to your XXXX.

Installation


1. Mount brackets on inside surface of your panel using studs, welds, M5 screws or Ø5 rivets

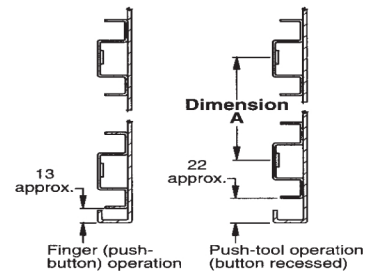

2. Slide receiver assembly into side of upper bracket



3. Remote latching style- Insert extension rod and actuator button into bracket. Two-point style - insert extension rod into brackets then slide of lower bracket and snap in actuator button.

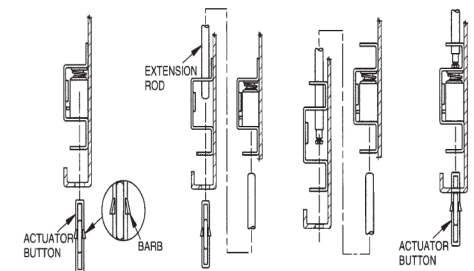

4. Mount one or two keepers with M5 screws. Keeper can be adjusted 3.2 from centre both vertically and horizontal for proper alignment with latch.

