


Fixed-Rod Latching System



- For 2 or 3-point latching
- Two rod type (Type H or Type S)
- Compatible with a wide variety of handles and latches (see chart)
- Assemblies include aluminium rods and zinc plated steel rod guides
- UL94-V2 flammability rating

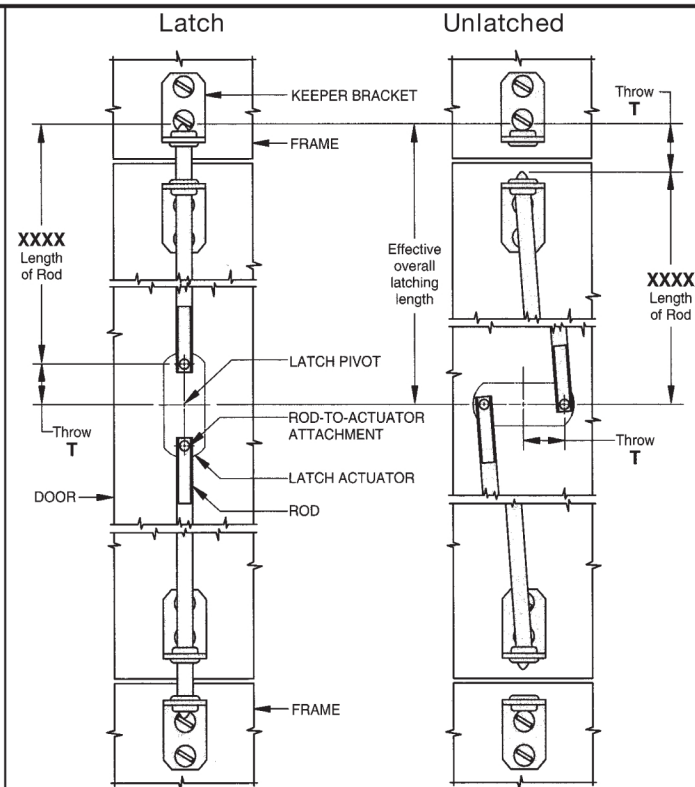

To Order rod assemblies, (assembly consists of a guide, keeper and rod):-

1. Determine basic part number from table below:

OPERATING LATCH FAMILIES	SIZE/STYLE	BASIC PART NUMBER	ROD TYPE	T
No. 01 Flush Cup Latches 	Small	A5-21-XXXX	S	12,7
	Mid-size	A5-31-XXXX		19
No. 24 Flush Cup Latches 	2 and 3 point assemblies	A5-32-XXXX	H	17,5
	X-Large			31,8
	Large			22,2
No. 62 Lift and Turn™ Latches 	Large (Flush)			31,8
	Mid-size T-handle			17,5
	Small T-handle	A5-22-XXXX		13,5
No. 68 Ball and T-handle Latches 	Large T-handle, Bail Handle (Series 80)	A5-32-XXXX		22,2
No. 92 L-handle and T-handle Latches 	ALL	A5-21-XXXX	S	19


2. Effective overall latching lengths = XXXX length + T. XXXX length rod 152 (6") to 2537 (99.9")

Max. must clear frame in unlatched position.

3. Replace XXXX in basic part number with your XXXX length expressed in millimetres.

Note: if XXXX length is determined in inches, that length must be converted to millimetres

(inches x 25.4) and rounded back to whole millimetres.

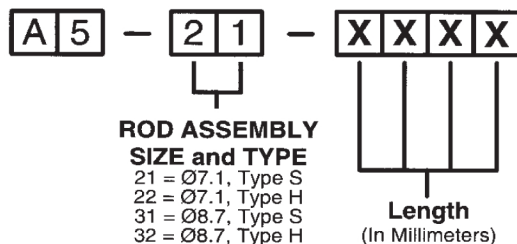

EXAMPLE:

If your required length is 895.9mm, substitute 0895 for the XXXX portion of the basic part number.

e.g. A5-21-0895