


Recessed Folding "T" Handle Latch




- Manual-adjusting, for single, two or three-point latching
- Non-locking and jey-locking versions
- T-Handle folds away
- Can be used to form a single-point, 2-point or 3-point latching
- Available with or without mounting studs
- Type "A" turns clockwise to latch
- Type "B" turns counterclockwise to latch
- Blind mount (mounting studs are No. 10-24 thread)

TYPE A Assembly Illustrated

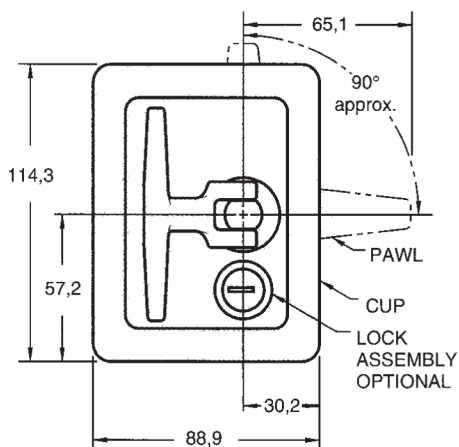

Grip Range

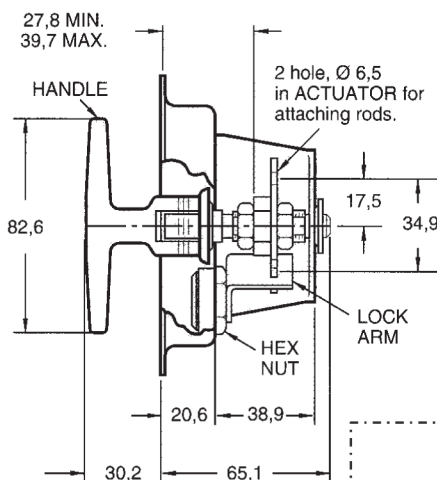


southco®

No. 24 Flush Latches with mounting studs


(mounting nuts and lockwashers supplied)

FLANGE GASKET OPTIONAL

- 7,9 MAX. panel thickness
- Tightening torque of mounting nuts not to exceed 2,8 N•m

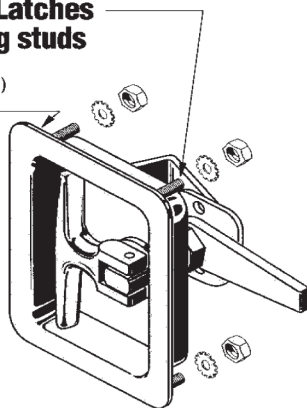

Panel Preparation

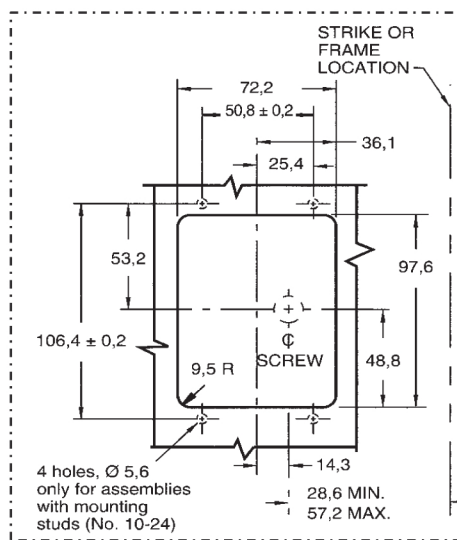

Part Numbers

Style	Part Numbers					
	With Mounting Studs				Weld	
	Cup and bracket: Polished stainless steel Handle: Die cast zinc, chrome plated		Cup and bracket: Steel, dacrotized Handle: Die cast zinc, dacrotized		Cup and bracket: Steel, dacrotized Handle: Die cast zinc, dacrotized	
	Type A	Type B	Type A	Type B	Type A	Type B
With Keylock (Keyed alike)	24-20-812-35	24-20-912-35	24-20-812-10	24-20-912-10	24-10-812-10	24-10-912-10
Without Keylock	24-20-302-35	24-20-402-35	24-20-302-10	24-20-402-10	24-10-302-10	24-10-402-10
Without Keylock	Dust and Moisture Sealed (Neoprene gasketed shaft and cup flange)				Sealed Shaft Only	
	24-20-312-35	24-20-412-35	24-20-312-10	24-20-412-10	24-10-312-10	24-10-412-10