


## Non-Locking Flush "T" Handle with Adjustable Grip



- An extra turn adjusts the amount of compression applied
- T-handle folds into a recessed dish
- 90 degree clockwise (Type A) rotation to latch
- Steel or stainless steel construction
- Die cast zinc handle
- Models with mounting studs are supplied with mounting nuts and lockwasher
- Cup and housing are polished stainless steel or dacrotized steel finish
- Handle is dacrotized or chrome plated

\* For optional gasket order part: 24-36-101-18

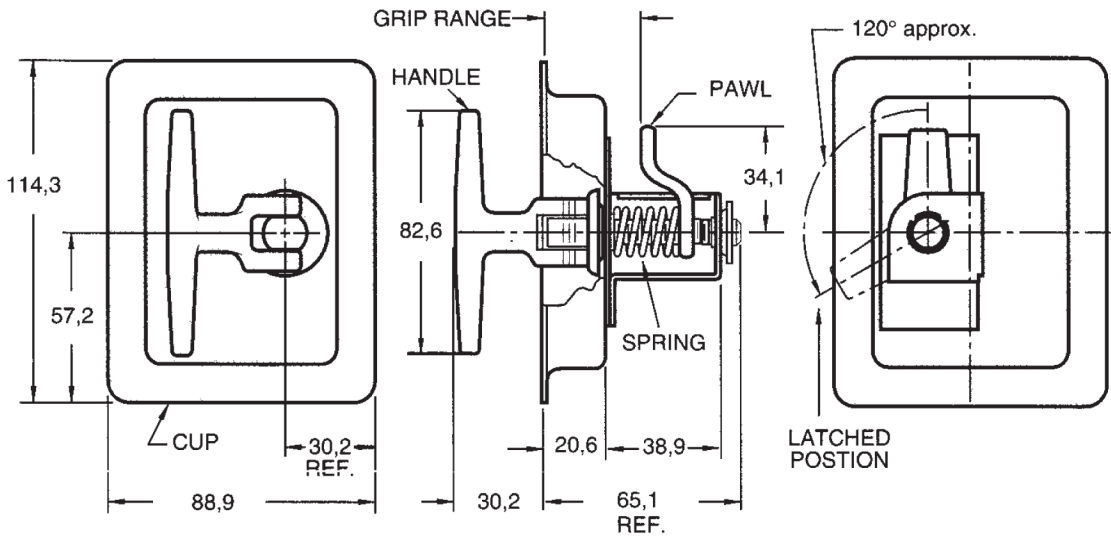



## Panel Preparation

### No. 24 Flush Latches with mounting studs

(mounting nuts and lockwashers supplied)

**FLANGE GASKET**  
**OPTIONAL**

- 7,9 MAX. panel thickness
- Tightening torque of mounting nuts not to exceed 2,8 N•m

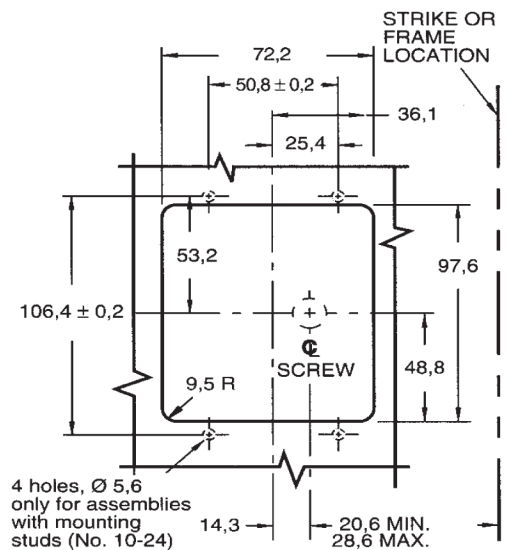

**southco®**

| Grip Range |      | Part Numbers<br>with Mounting Studs                                                    |                                                                              |
|------------|------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
|            |      | Cup and Housing:<br>Polished stainless steel, Handle:<br>Die cast zinc, chrome plated. | Cup and Housing:<br>Steel, dacrotized. Handle:<br>Die cast zinc, dacrotized. |
| Min        | Max  | Type A                                                                                 | Type A                                                                       |
| 19.1       | 37.3 | 24-20-101-35                                                                           | 24-20-101-10                                                                 |
| 31.8       | 50.2 | 24-20-102-35                                                                           | 24-20-102-10                                                                 |
| 44.5       | 61.9 | 24-20-104-35                                                                           | 24-20-104-10                                                                 |