


Arrowhead Latch with adjustable Pawl



- Detents in full open and full closed position
- Arrow on black plastic knob indicates pawl position
- Knob height is adjustable within limits shown by adjusting ferrule on threaded sleeve before installing latch
- Turns clockwise (Type A) or counter-clockwise (Type B) to latch
- Pawl is adjustable along threaded steel shaft for desired grip
- Finish: Knob is black nylon, shaft and pawl are zinc plated with chromate plus sealer

Part Numbers	Installation				
	H ±0.13	W +0.13 -0.00	X		Shaft thread size
			Min	Max	
69-10-301-11	8.33	6.99	9.53	11.11	6-32 UNC
69-10-401-11	11.51	9.78	12.3	13.10	10-32 UNF
69-10-501-11	16.26	13.72	22.23	25.40	5/16-24 UNF

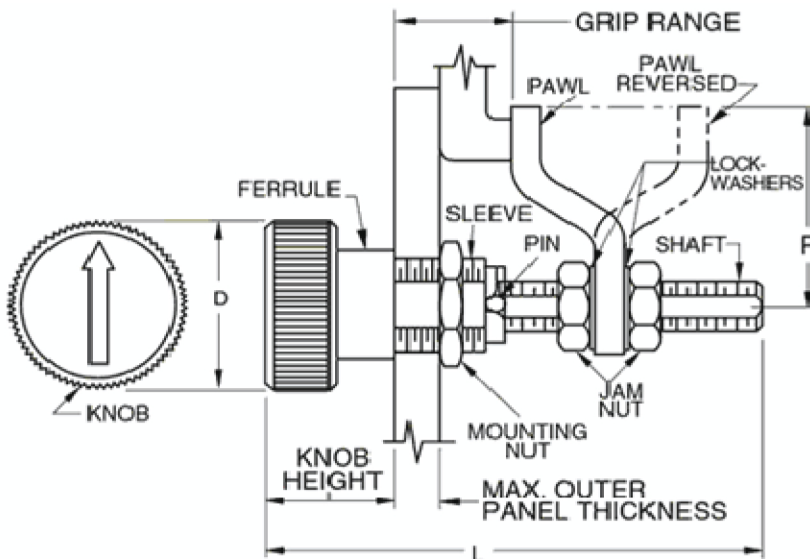

southco®

Part Number	Series	Dimension			Knob Height	Max.Outer Panel Thickness	Grip Range			
		ø D	L	P			Pawl as shown		Pawl reversed	
							Min	Max	Min	Max
69-101-301-11	300	12.7	39.3	13.5	12.7 Max.	1.59	4.0	13.4	15.0	24.6
					9.5 Min.	4.75	7.1	18.3	18.3	28.2
69-101-401-11	400	19.1	47.6	15.9	17.5 Max.	1.59	3.2	15.9	15.9	28.6
					12.7 Min.	6.35	7.9	20.6	20.6	33.3
69-101-501-11	500	28.6	79.8	34.1	25.4 Max.	6.35	4.8	30.2	30.2	55.6
					19.1 Min.	12.70	11.1	36.5	36.5	61.9