


Adjustable Compression Spring Latch, Bail-Handle Style




- Camming action of spring pawl provides wide grip range
- An extra turn adjusts the amount of compression applied
- Rivet and weld mounting styles
- Steel construction
- Long and intermediate grip styles are furnished with spacer
- Furnished with one .4 thick and two .8 thick shims
- Zinc plated with chromate plus sealer

southco

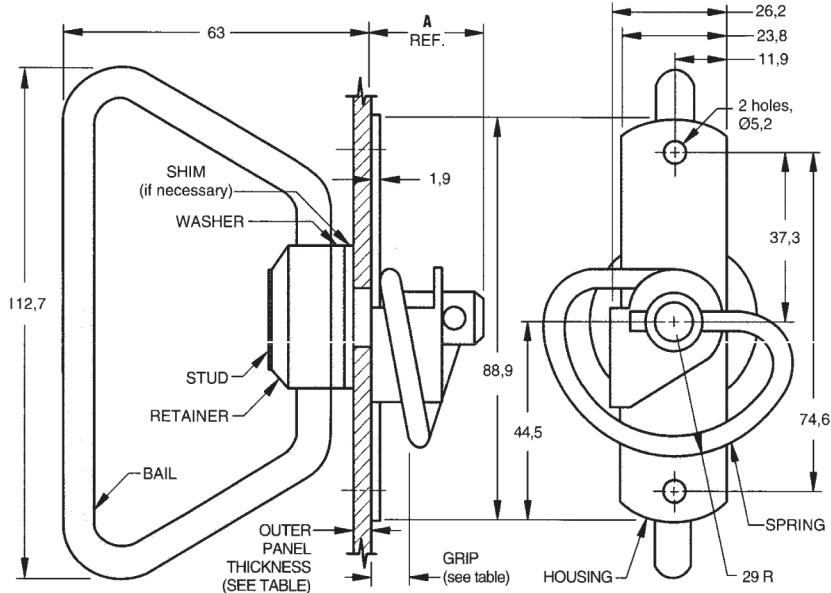


Latch with spacer (only with intermediate or long grip styles; see table).

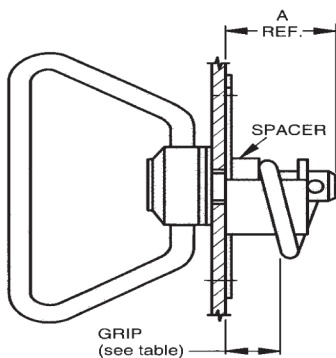

GRIP		A Ref.	MOUNT STYLE	PART NUMBERS
MIN.	MAX.			
2,4	14,3	25	Rivet	57-40-701-80 •
			Weld	57-40-702-85 •
12,7	24,6	35,3	Rivet	57-40-704-80
			Weld	57-40-705-85
23,4	35,3	46	Rivet	57-40-707-80
			Weld	57-40-708-85 •

Installation

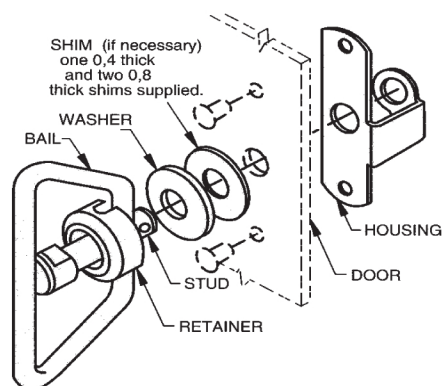

OUTER PANEL THICKNESS	NUMBER OF SHIMS NEEDED
4,6 to 5	None
4,2 to 4,6	One - 0,4
3,8 to 4,2	One - 0,8
3,4 to 3,8	One - 0,8 thick and One - 0,4 thick
3 to 3,4	Two - 0,8 thick
2,6 to 3	Two - 0,8 thick and One - 0,4 thick

