

Compression Latches

Miniature Adjustable Compression Latch





(Hex Socket)







(Slotted Head)





(Phillips Recess)


- Rugged construction
- An extra turn adjusts the amount of compression applied
- Single hole installation
- Steel or stainless steel construction
- Four access styles including hand and tool operated
- Steel components
- Stainless steel spring
- Black nylon knob (knob style)
- Finished with pawl and mounting hardware
- Clockwise (Type A) or counterclockwise (Type B) rotation to latch
- Components are zinc plated
- Housing is chemical protective film coated

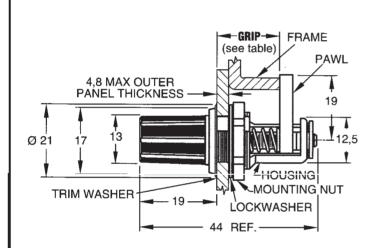

















		Part Numbers					
Grip Range		Knob Style		Slotted Head	Hex Socket	Philips Recess	Pawl Positions
				slot width = 1,3 slot depth = 2	Hex Socket size is 4 mm	No. 2 size phillips recess	
Min	Max	Type "A"	Type "B"	Type "A"	Type "A"	Type "A"	
2.4	9.5	48-10-401-10	48-20-401-10	48-11-R	48-81-R	48-91-R	А
8.7	15.9	48-10-402-10	48-20-402-10	48-12-R	48-82-R	48-92-R	В
15.1	22.2	48-10-403-10	48-20-403-10	48-13-R	48-83-R	48-93-R	С