



Adjustable Compression Latch, Large Size

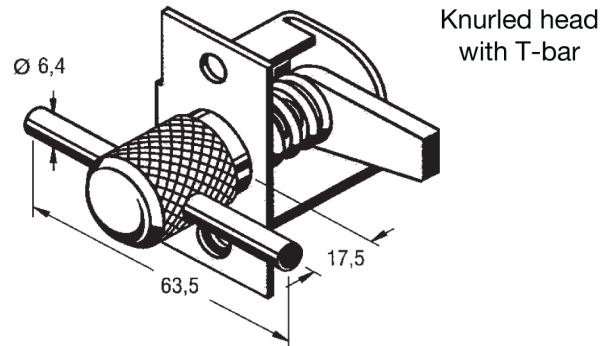


- Five actuation styles including hand and tool operated
 - An extra turn adjusts the amount of compression applied
 - Three hole mount
 - Steel construction
 - Turn 90° clockwise to latch
 - Multiple grip ranges (see pawl style A,B & C)
 - Finished with pawl, retaining washer, spring, and bushing
 - Dust and moisture sealed models are also furnished with retainer plate and cork-rubber gasket
 - Zinc plated with chromate plus sealer
- * To purchase Tool for toolhead Recess Style order P/N:29-90-215-10

Knurled Knob

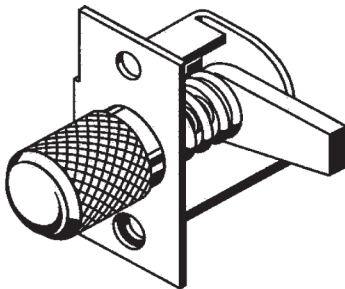


Knurled head with T-bar


Hex Socket

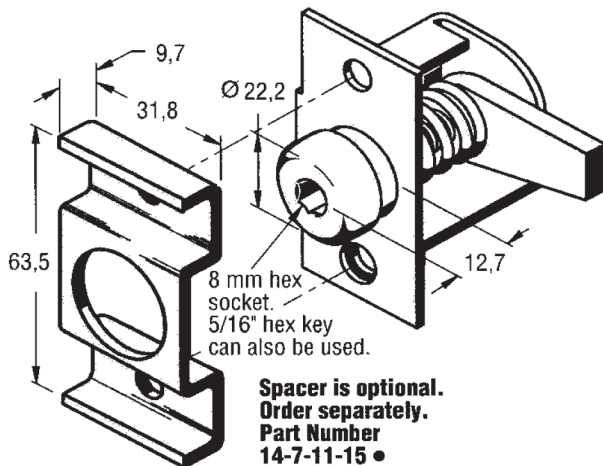


Slotted Flush Head with Spacer

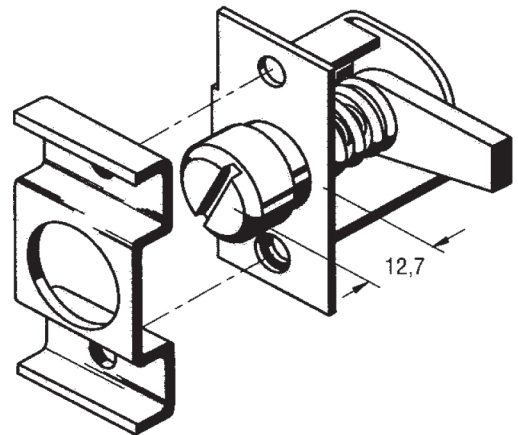



Dust and Moisture Seal (Knurled shown)

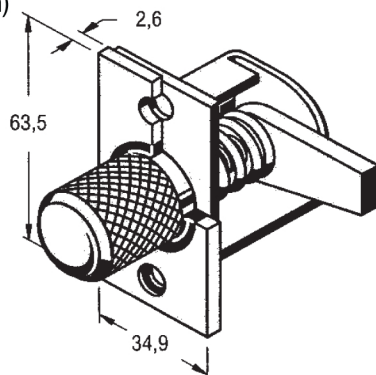

Toolhead™ Recess

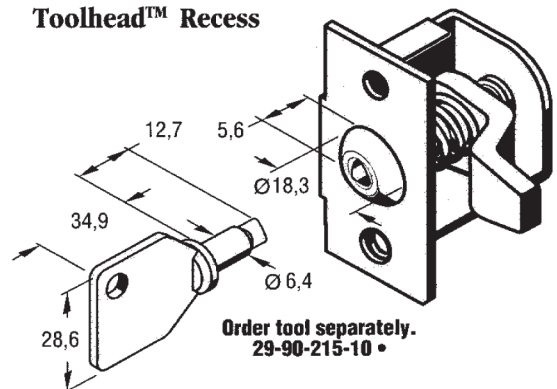


Adjustable Compression Latch, Large Size (cont.)

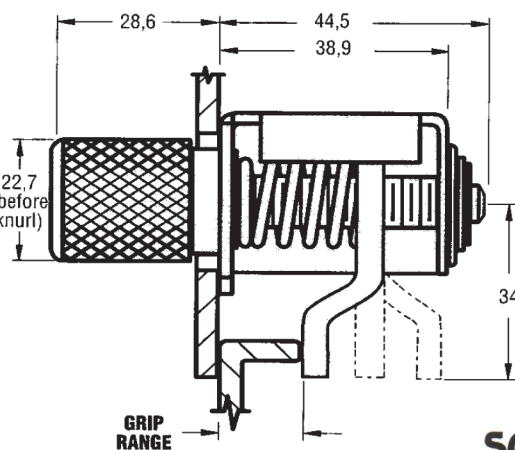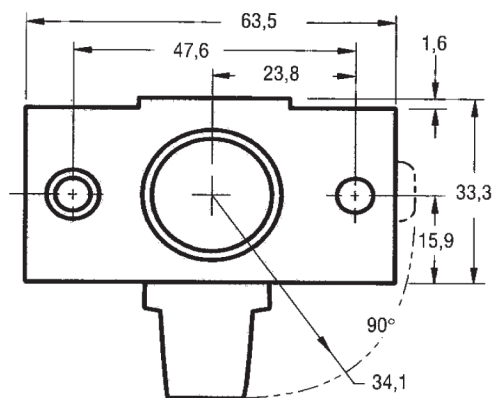


southco®

Pawl Style And Positions

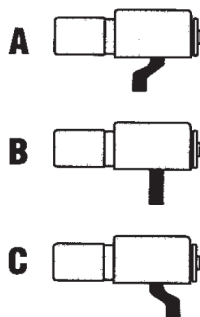

Panel Preparation

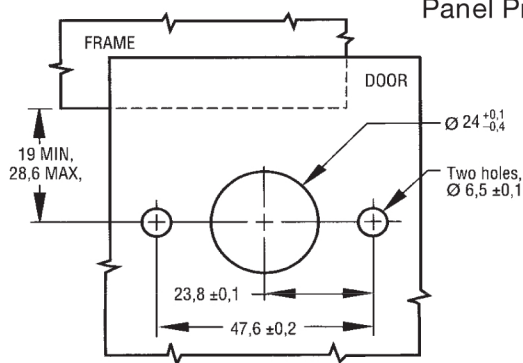

Style	Grip Range		Part Numbers	Pawl Position
	Min	Max		
Knurled head	0	19	14-10-11-11	A
	10	31	14-10-13-11	B
	23	42	14-10-14-11	C
Knurled head with T-bar	0	19	14-10-51-11	A
	10	31	14-10-53-11	B
	23	42	14-10-54-11	C
Hex-socket head	0	19	14-10-91-11	A
	10	31	14-10-93-11	B
	23	42	14-10-94-11	C
Slotted Flush head	0	19	14-10-71-11	A
	10	31	14-10-73-11	B
	23	42	14-10-74-11	C
Slotted Flush head with spacer	10	28	14-10-61-11	A
	20	40	14-10-63-11	B
	33	51	14-10-64-11	C
Knurled head - Dust and moisture seal	4	15	14-910-11-11	A
	14	35	14-910-13-11	B
	27	46	14-910-14-11	C
Knurled head with T-Bar - Dust and moisture seal	4	15	14-910-51-11	A
	14	35	14-910-53-11	B
	27	46	14-910-54-11	C
Slotted Flush head with T-Bar -Dust and moisture seal (no spacer)	4	15	14-910-71-11	A
	14	35	14-910-73-11	B
	27	46	14-910-74-11	C
Toolhead Recess	0	19	14-T-1	A
	10	31	14-T-3	B
	23	42	14-T-4	C