


## Adjustable Compression Latch, Medium Size




- Variety of styles
- An extra turn adjusts the amount of compression applied
- Three hole mount
- Steel or stainless steel construction
- Clockwise (Type A) or counterclockwise (Type B) rotation to latch
- Multiple grip ranges (see pawl style A,B & C)
- Hand or tool operated models are zinc plated with chromate plus sealer or passivated stainless steel
- Key-locking models are available in natural, chrome plated, or black powder coated finish
- \* To purchase optional black powder coated trimplate for concealing mounting hardware order P/No: 44-30-101-10
- \* To purchase tool for Toolhead Recess Style order P/N:29-90-215-10

**S**


Back nylon knob

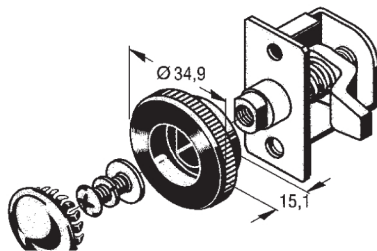


Head-Socket

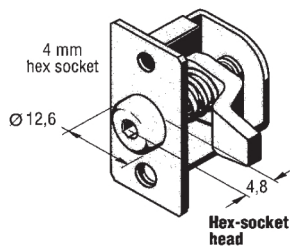


Knurled Head with T-bar

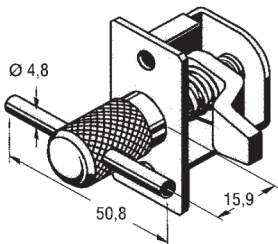


Low-profile back knob





Knurled



Slotted Knurled




Keylocking

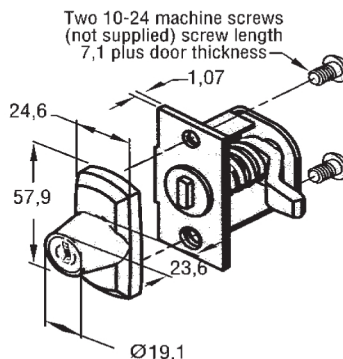


Slotted Flush

Toolhead Recess

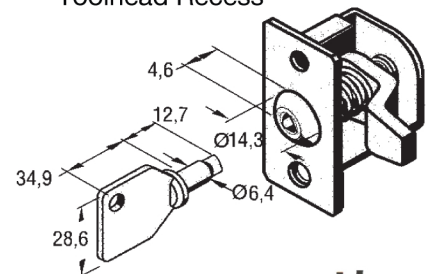


**southco®**

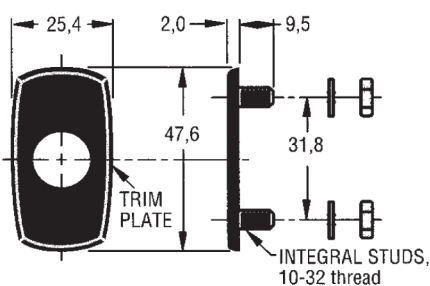


P/N: 44-30-101-10

### Trimplate (optional)


- Steel construction
- Can be used with all medium size adjustable compression latch styles except key-locking
- Furnished with two nuts and two lockwashers
- Phosphate dip plus black powder coated finish

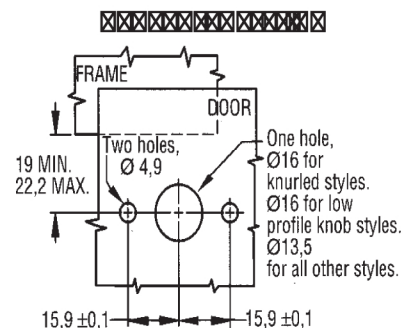


## Adjustable Compression Latch, Medium Size (cont.)

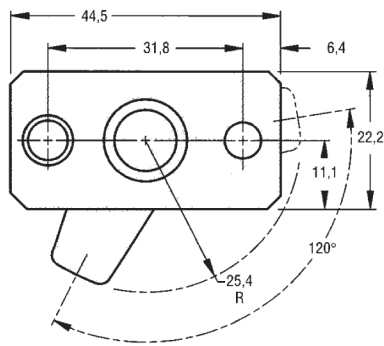

**southco®**

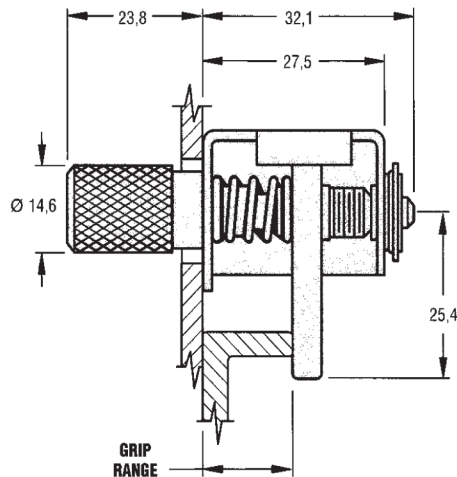

### Pawl Style and Positions



| Styles                                                              | Door Thickness | Grip Range |      | Part Numbers                            |               |                                      | Pawl Position                       |
|---------------------------------------------------------------------|----------------|------------|------|-----------------------------------------|---------------|--------------------------------------|-------------------------------------|
|                                                                     |                |            |      | Steel                                   |               | Stainless steel, passivated Type "A" |                                     |
|                                                                     |                | Min        | Max  | Type "A"                                | Type "B"      |                                      |                                     |
| Black Nylon Knob                                                    | 1.2 to 2.8     | 3.2        | 9.5  | 44-99-116-11                            | 44-99-117-11  | -----                                | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-99-116-12                            | 44-99-117-12  | -----                                | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-99-116-13                            | 44-99-117-13  | -----                                | C                                   |
|                                                                     | 2.8 to 4.4     | 3.2        | 9.5  | 44-99-119-11                            | 44-99-120-11  | -----                                | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-99-119-12                            | 44-99-120-12  | -----                                | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-99-119-13                            | 44-99-120-13  | -----                                | C                                   |
| Low Profile Black Knob                                              | 0.8 to 6.4     | 3.2        | 9.5  | 44-1-34-0                               | -----         | -----                                | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-1-35-0                               | -----         | -----                                | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-1-36-0                               | -----         | -----                                | C                                   |
| Knurled head                                                        | -----          | 3.2        | 9.5  | 44-1-1-0                                | 44-10-1-0     | 44-1-1-24                            | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-1-2-0                                | 44-10-2-0     | 44-1-2-24                            | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-1-3-0                                | 44-10-3-0     | 44-1-3-24                            | C                                   |
| Knurled head with T-bar                                             | -----          | 3.2        | 9.5  | 44-1-7-0                                | -----         | -----                                | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-1-8-0                                | -----         | -----                                | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-1-9-0                                | -----         | -----                                | C                                   |
| Hex-socket head (4mm)                                               | -----          | 3.2        | 9.5  | 44-1-22-0                               | 44-10-22-0    | -----                                | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-1-23-0                               | 44-10-23-0    | -----                                | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-1-24-0                               | 44-10-24-0    | -----                                | C                                   |
| Slotted knurled head                                                | -----          | 3.2        | 9.5  | 44-1-10-0                               | 44-10-10-0    | -----                                | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-1-11-0                               | 44-10-11-0    | -----                                | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-1-12-0                               | 44-10-12-0    | -----                                | C                                   |
| Slotted flush head                                                  | -----          | 3.2        | 9.5  | 44-1-16-0                               | 44-10-16-0    | 44-1-16-24                           | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-1-17-0                               | 44-10-17-0    | 44-1-17-24                           | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-1-18-0                               | 44-10-18-0    | 44-1-18-24                           | C                                   |
| Toolhead Recess                                                     | -----          | 3.2        | 9.5  | 44-T-1                                  | -----         | -----                                | A                                   |
|                                                                     |                | 9.5        | 19.1 | 44-T-2                                  | -----         | -----                                | B                                   |
|                                                                     |                | 19.1       | 28.6 | 44-T-3                                  | -----         | -----                                | C                                   |
| LOCK HOUSING FINISH                                                 |                |            |      |                                         |               |                                      |                                     |
|                                                                     |                |            |      | Nature<br>plus chemical protective firm | Chrome plated | Black power coated                   | A<br><br><br><br>B<br><br><br><br>C |
| Keylocking<br>(Locks are keyed alike. Different keycodes available) | 1.07 to 2.36   | 3.2        | 9.5  | 44-99-222-51                            | 44-99-222-61  | 44-99-222-71                         |                                     |
|                                                                     |                | 9.5        | 19.1 | 44-99-222-52                            | 44-99-222-62  | 44-99-222-72                         |                                     |
|                                                                     |                | 19.1       | 28.6 | 44-99-222-53                            | 44-99-222-63  | 44-99-222-73                         |                                     |
|                                                                     | 2.36 to 3.96   | 3.2        | 9.5  | 44-99-223-51                            | 44-99-223-61  | 44-99-223-71                         |                                     |
|                                                                     |                | 9.5        | 19.1 | 44-99-223-52                            | 44-99-223-62  | 44-99-223-72                         |                                     |
|                                                                     |                | 19.1       | 28.6 | 44-99-223-53                            | 44-99-223-63  | 44-99-223-73                         |                                     |