



Compression Latches

Knob Style Vise Action ® Compression Latch




- Round or shaped installation hole
 - Internal O-ring gasket
 - Wide glange for mounting in non-metallic materials
 - Die-cast construction
 - Finished with pawl and mounting hardware
 - Black powder coating finish
- * For optional spur washer order P/No:90-6-875


Grip Range		Part Number
Min	Max	
11.4	27.2	E3-10-504-50
25.4	41.1	E3-10-505-50
38.9	54.6	E3-10-506-50
52.6	68.3	E3-10-505-50
66.3	76.2	E3-10-504-50

* The same pawl (curved forward or reversed) is supplied for both short and long grips


++ For intermediate grip, straight pawl is supplied.

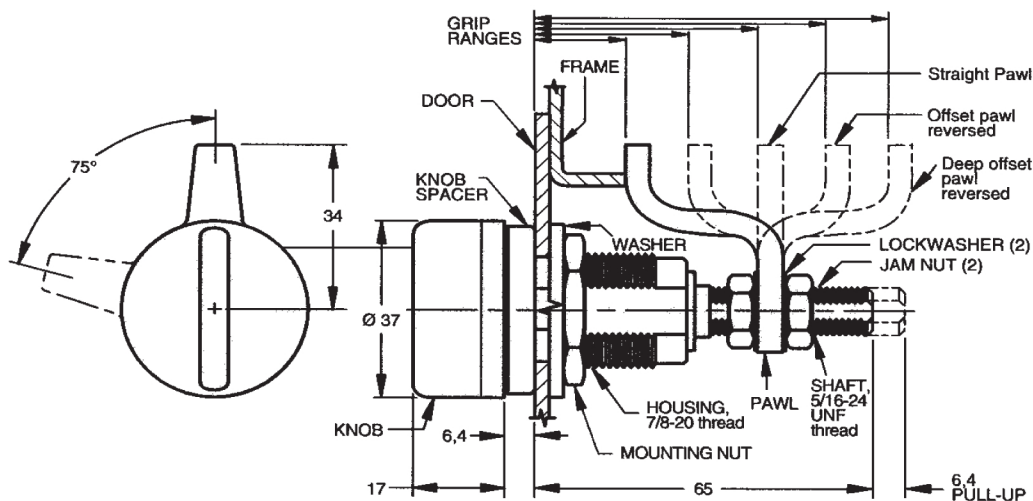

INSTALLATION

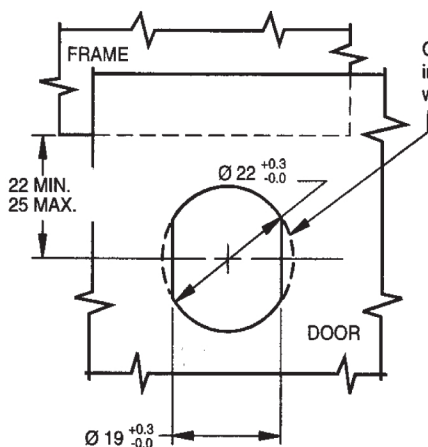

OPTIONAL: Round hole installation with spur washer (see page E-9).

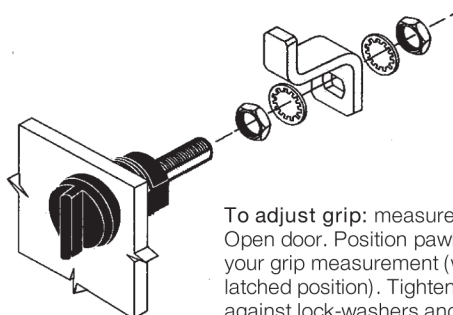

To adjust grip: measure your grip. Open door. Position pawl on shaft to your grip measurement (with pawl in latched position). Tighten jam nuts hard against lock-washers and pawl using two wrenches.

For Gasketed Door

