

Low-Profile, Key Actuated Cam Lock




southco®

- Turn the knob to unlatch
- Push the door to close
- Operates only with the key
- Chrome plated zinc die die cast housing
- Lock plug is zinc die cast with stainless steel scalp
- UL 94-HB flammability rating
- Lock are furnished keyed alike


- * Different key codes are available upon request
- * For optional plastic sealing cover (100 series) order part #90-4
- * For optional plastic sealing cover (200 series) order part #90-2

INSTALLATION

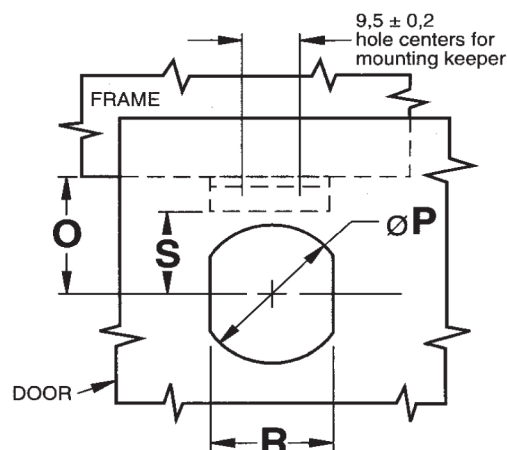


Series	Installation Dimensions			
	O	P	R	S
100	24 ±1.5	25.5 ±0.1	22.2 +0.03/-0	16 ±1.5
200	20 ±1.5	19 +0.03/-0	16.3 +0.02/-0	12 ±1.5

Optional Sealing Cover (Black)

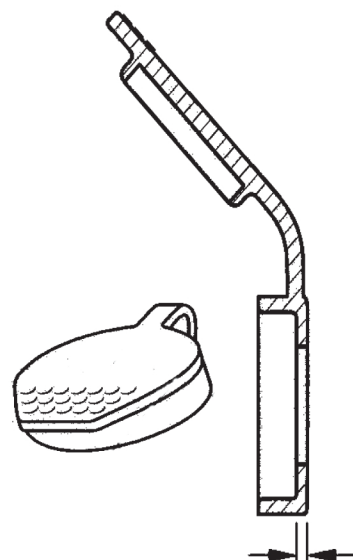

When using Sealing Cover, add this dimension to your grip, 2,3.

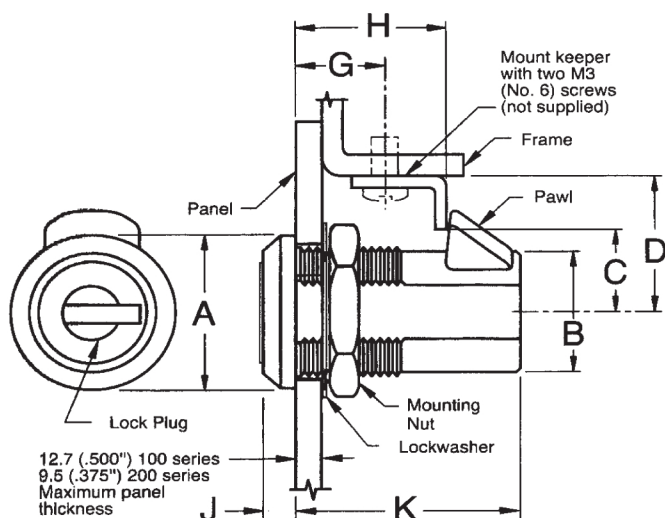

12.7 (.500") 100 series
9.5 (.375") 200 series
Maximum panel
thickness

Dimension								Part Numbers		Lock Plug Finish
ØA	ØB	C	D	G	H	J	K	Low profile,key actuated style		
100 series										Bright
29	24	16 ±1.5	24 ±1.5	17 ±1.2	25 ±0.4	4.8	37	93-10-101-10		Bright
200 series										
23	17	12 ±1.5	20 ±1.5	12 ±1.2	20 + 0.6/ - 0.2	4.8	30	93-10-201-10		Bright