


Compression Style Slam Latch



southco®


OPERATION

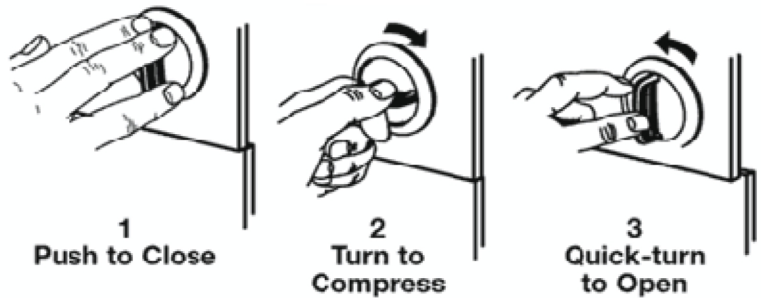


- Quick turn to open
- Self-centering to assist panel alignment
- Vibration resistant design
- Durable, corrosion resistant materials
- Slotted head and wing head style
- Fits panels up to 8mm thick
- Diver and bezel are acetal, black
- Housing, retaining ring and receptacle are black nylon
- Receptacle must be ordered separately
- Shipped unassembled, bulk packaged

Panel Preparation


Door Preparation for Latch

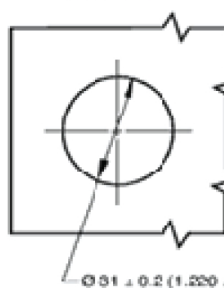


Door Preparation for Receptacle

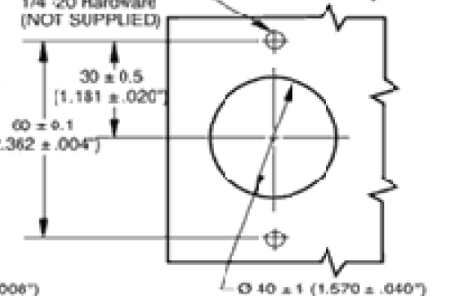

Wing Head


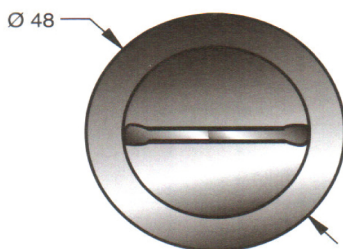


Slotted Head

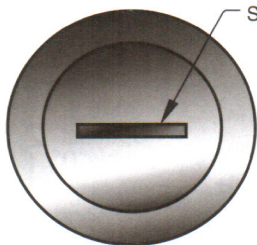

SLOTTED RECESS
3,5 WIDE X
23 LONG X
4 DEEP
(AT CENTRE)

Receptacle

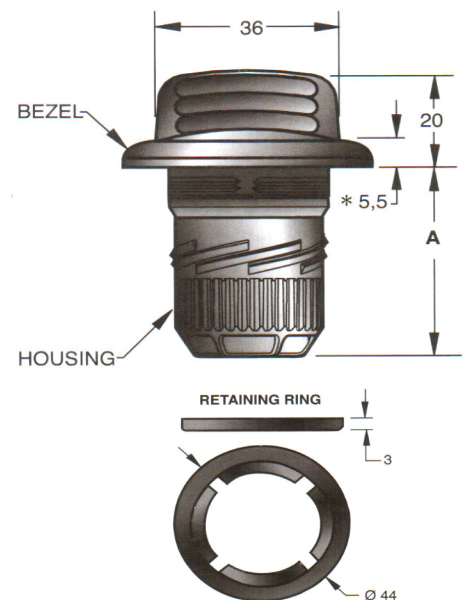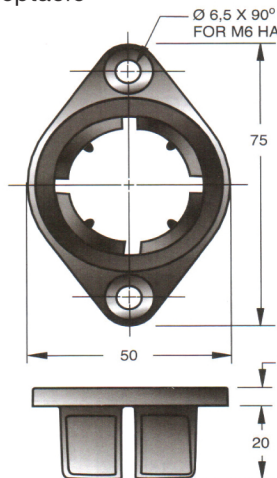

Latch assembly	Part Number	Frame Thickness		A	B
		Min	Max		
Slotted Head 	M2-22-11	1	4	38.5	6 Min 9 Max
	M2-22-21	1	4	42.5	9 Min 13 Max
Wing Head 	M2-22-12	1	4	38.5	6 Min 9 Max
	M2-22-22	1	4	42.5	9 Min 13 Max
Receptacle	M2-27-12				