


Slam-lock in two different versions.

Version A: The spring loaded cam is operated by the key.

Version B: The spring loaded cam is operated by a lockable push-button

Material for both version:-

- Slam-lock: Zinc die, chrome plated
- Nut: Zinc die.

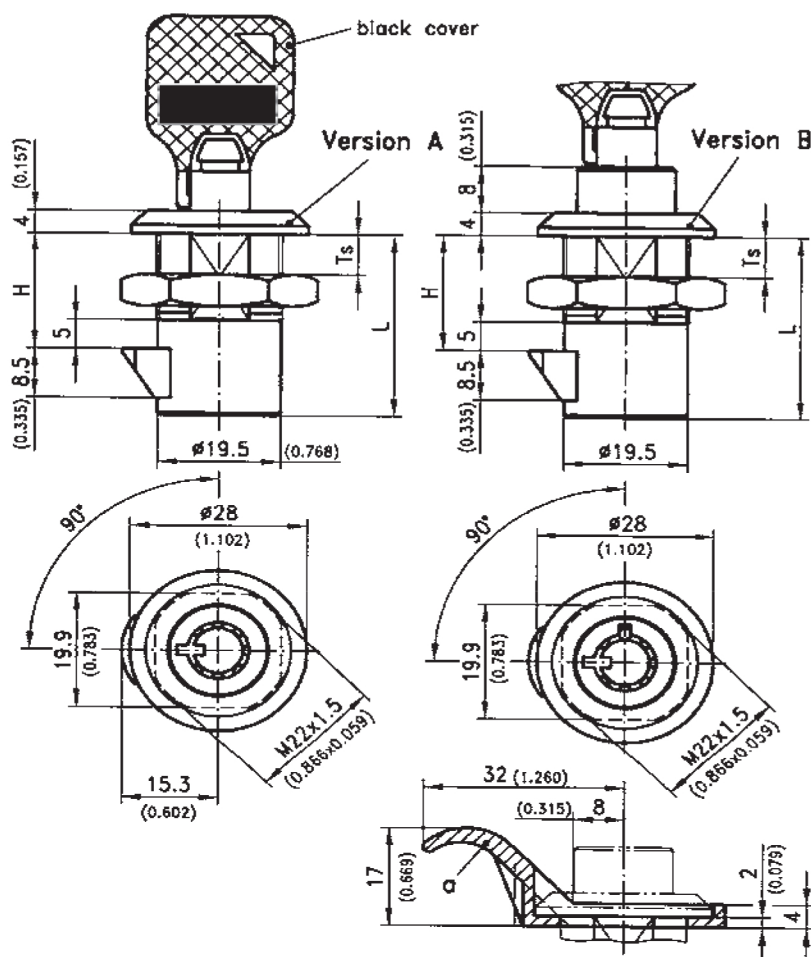

Length of body	L	31.5	36.5
Door thickness	Ts max.	10	15
Latching distance	H	20	25

A Slam-lock : Key controlled

With plain / earth nut

Keyed alike D0205 264-9002 264-9004

Keyed diferent / mixed 264-9001 264-9003

B Slam-lock : Push-button controlled

With plain / earth nut

non-locking 264-9009 ---

Keyed alike D0205 264-9006 264-9008

Keyed diferent / mixed 264-9005 264-9007

All locks supplied with 2 keys.

Optional for both versions:

a) Finger pull

200-4703.3

By using a finger pull the dimension Ts and H decreases by 2mm

Cut-out

