



Tool Actuated Quarter-Turn Slam Latch






- Quarter-turn to open- push to close
- Hand and tool actuated styles
- Simple installation
- Two size available
- Hex socket actuation provides added security
- Housing is zinc plated steel
- Slide and pinion are die cast zinc with black organic coating
- Base is die cast zinc with chemical protective
- Finished with spring, retainer, lockwasher and sleeve
- For optional installation wrench order
P/No: A6-10-15640-11 (series 40) or
P/No: A6-10-15641-11 (series 60) or

southco®

PANEL PREPARATION

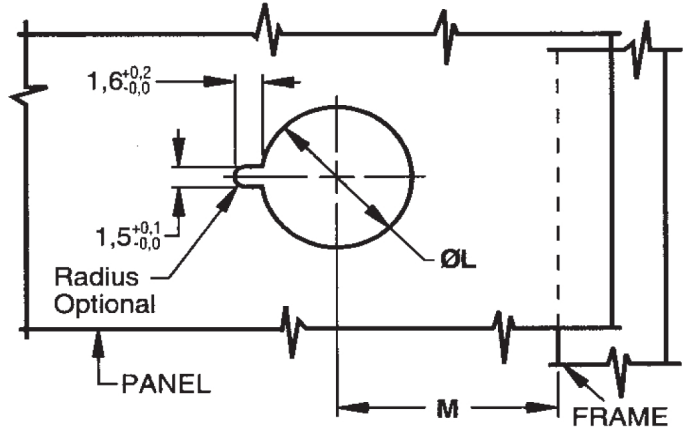

Series	ØL	M
40	11.2 ± 0.1	16 ± 1.5
60	16 ± 0.1	24 ± 2.2

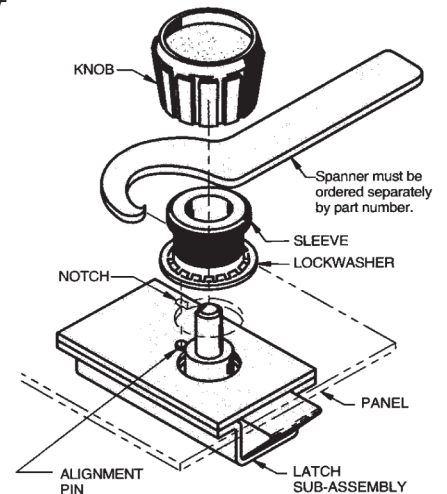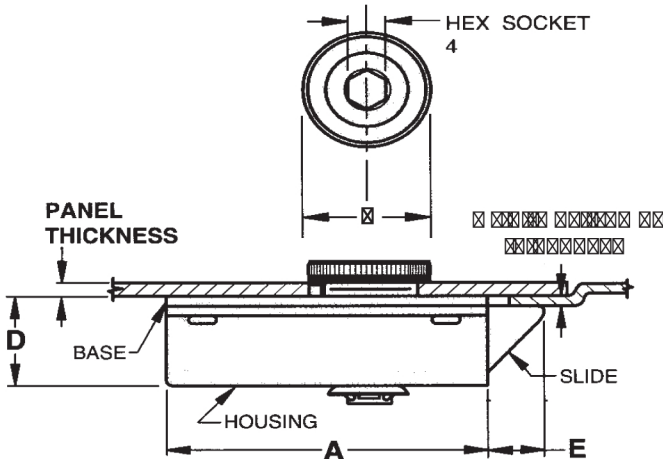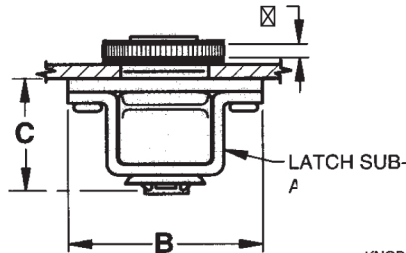

Series	Panel Thickness		Grip (Max. frame Thickness)	Dimensions							Part Number
	Min	Max		A	B	C	D	E	F	G	
40	1	3.2	1.6	35	23	13.5	11	6.5	2.5	14.5	A6-40-312-10
			3.2			15	12.5				A6-40-314-10
60	1	4.8	2.5	52.5	32	19	16	9.5	3	19	A6-60-313-10
			4.8			21	18.5				A6-60-316-10