

Slam Latch HD

for doors and panels




Slam latch for doors and panels, can be opened by key or handle.

The slam latch is screwed onto the latch support, which is either screwed or, in case of heavy application, welded to the door. If assembled without insert it can be opened with tapered square key. The slam bolt has a free stroke.

Material:-

- Housing: Steel, glav.
- Bolt: Zinc die, glav.

View from inside
of door

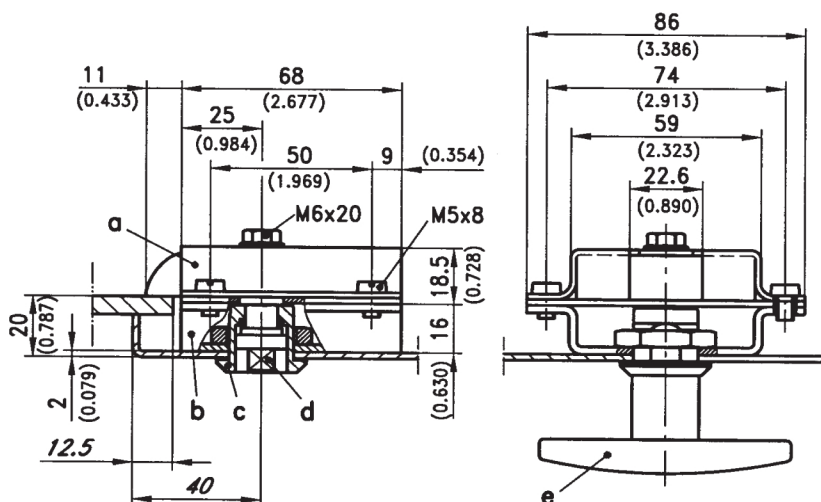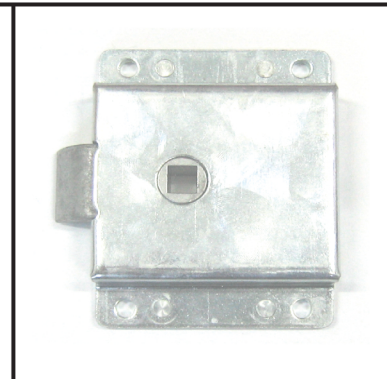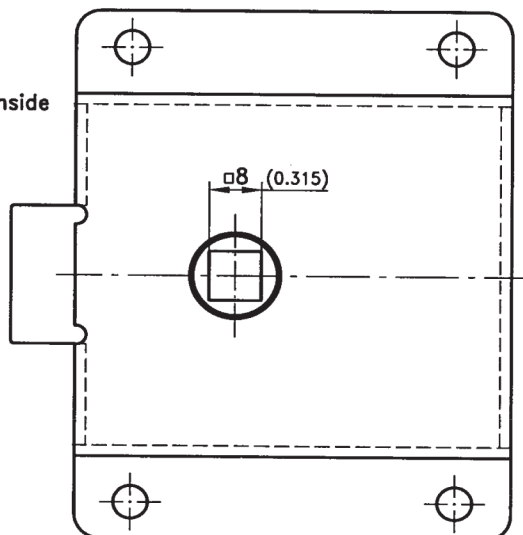

Decsription	Part Number
a) Slam Latch	229-9101
b) Latch Support	229-0501
c) Housing with nut	200-9005

Optional:

d) Inserts : Refer to Quarter-Turn pages

e) T-Handle: T-92-L/R

L-Handle: 92-LH/RH

Wing-handle: 9115