


Flush Slide Latch




- Slide to open
- Push the door closed to latch
- Corrosion resistant ABS construction with stainless steel
- Three size available
- Single hole, snap in installation
- UL 94-HB flammability
- Textures Black finish


Series 40 and 50

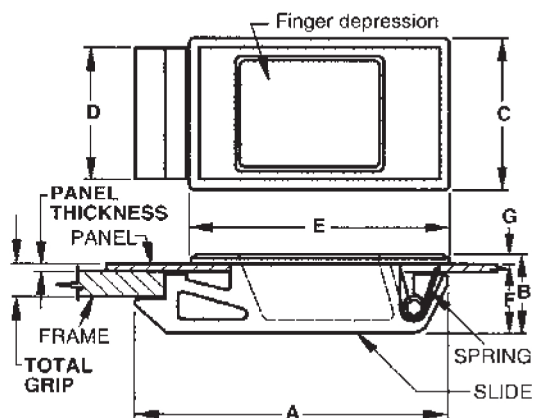


Series 90

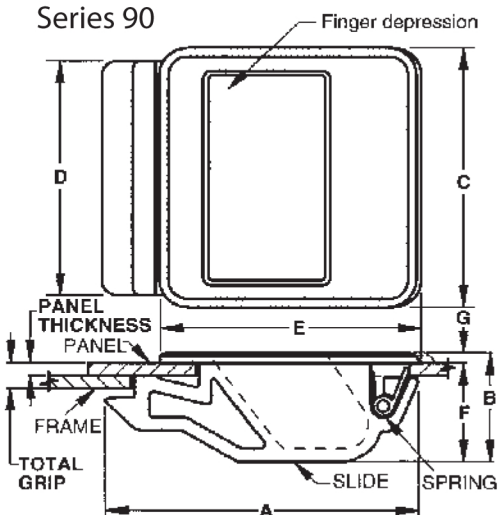


1. Prepare burr-free hole

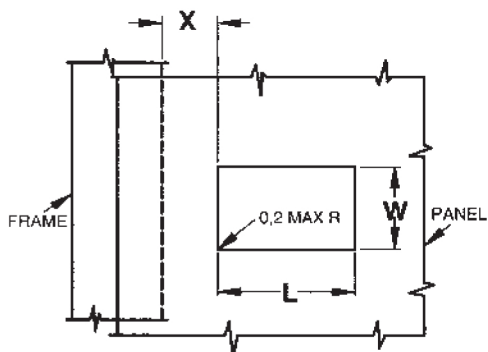

southco

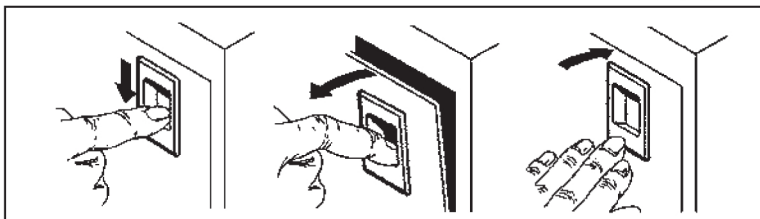


2. Slip front of latch through hole. Push forward

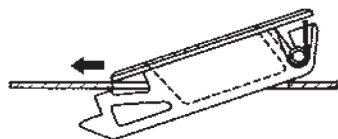

Snap back end of latch into position

3.

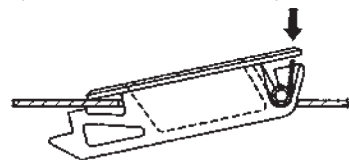

SERIES	INSTALLATION		
	L	W	X
40	38 $^{+0,2}_{-0,0}$	25,5 $^{+0,0}_{-0,2}$	12,6 $^{+1,0}_{-0,5}$
50	38 $^{+0,2}_{-0,0}$	44,5 $\pm 0,1$	12,5 $^{+1,0}_{-0,5}$
99	38 $^{+0,2}_{-0,0}$	44,5 $\pm 0,1$	12,5 $^{+1,0}_{-0,5}$

Size	Grip		Dimension							Part Number
	Panel Thickness	Total Grip	A	B	C	D	E	F	G	
Series 40	1.2 ± 0.1	6.4 ± 0.1	57	15	28	25	47	13	2	A3-40-525-12
	1.8 $+0.1/-0$	6.6 ± 0.1	57	15	28	25	47	13	2	A3-40-625-12
Series 50	2.2 $+0.2/-0$	6.4 ± 0.1	57	15	47	44	47	13	2	A3-50-925-12
Series 99	2.2 $+0.2/-0$	6.4 ± 0.1	57	21	50	44	48	19	2	A3-99-122-12