



Tab Style Slide Latch




- Slide to open
- Push the door closed to latch
- Non-Corrosive ABS construction with stainless steel
- Two size available
- Single hole, snap in installation
- UL 94-HB flammability
- Black finish

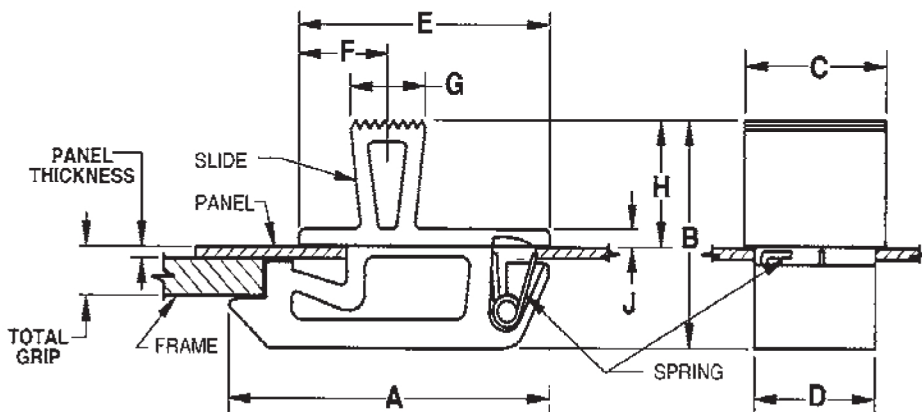


southco


1. Prepare burr-free hole

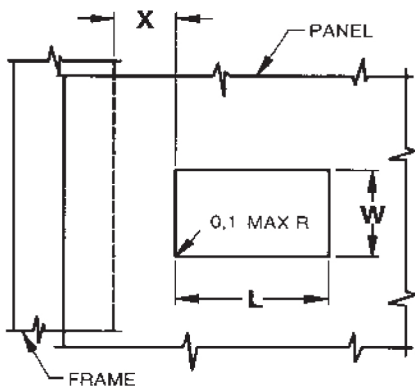




SERIES	INSTALLATION		
	L	W	X
20	12,7±0,1	7,8±0,05	6,4 ±0,8
30	22,2±0,1	14,3±0,1	9,5±0,7



2. Slip front of latch through hole. Push forward

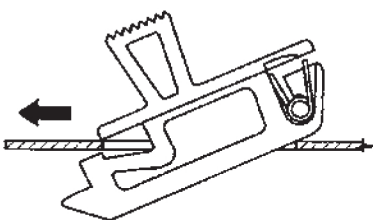

3. Snap back end of latch into position.

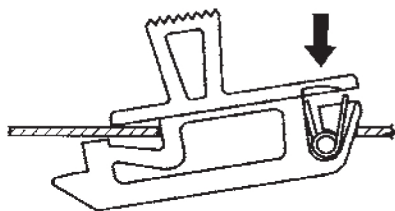

Panel Thickness	Total Grip	A	B	C	D	E	F	G	H	J	Part Number	Series
1±0.1	3±0.1	22.5	15.5	9.5	7.5	18	6.5	5.5	8.5	1.5	A3-20-412-12	20
1.2 +0.2 / -0	4.8±0.1	36	22.5	16.5	14	29	10.5	9	13	2	A3-30-519-12	30