

Flush Simplicity Latch







- Lift handle and pull to open
- Push the door closed to latch
- Very low profile
- Corrosion resistant
- Single, round hole installation
- Latch and housing feature acetal construction
- Furnished with Type 304 stainless steel keeper and Type 302 stainless steel screws
- Minimum pawl engagement is 3.0mm
- Black finish

Door Thickness Range	A	B	Part Number
1 - 7	16	20.4	M1-81
7 - 13	16	14.3	M1-82
13 - 19	22	14.3	M1-83

LATCH

MOUNTING CUP

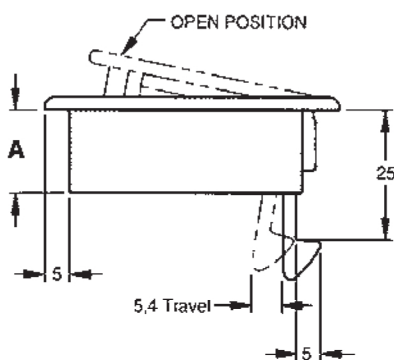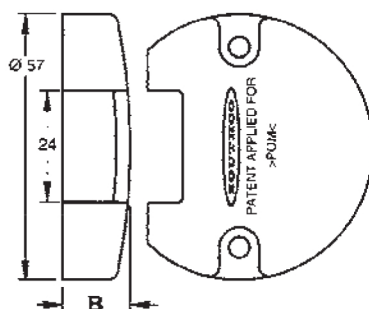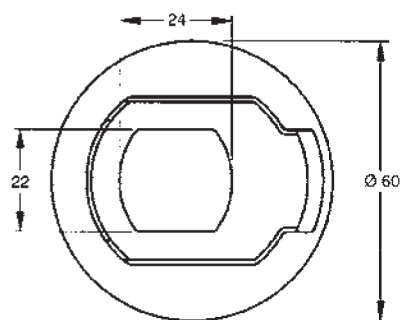

Panel Preparation

