

Slam Action Paddle Handles


Stainless Steel Non-Locking Paddle Latch With Plastic Slide, Small Size






- Pull paddle to open
- Push the door to close
- Six pawl/slide styles are available to accommodate different door thickness
- Latch is flush with outer panel
- Single hole installation
- Cup, cover and Paddle are Type 304 stainless steel
- Bracket, spring and screw are stainless steel
- UL 94 V-O flammability rating
- Slide is glass reinforced nylon
- Brushed stainless steel finish

southco®

Installation

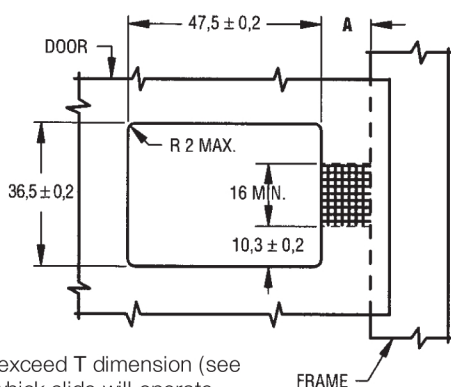

Door Thickness must not exceed T dimension (see table) in area through which slide will operate

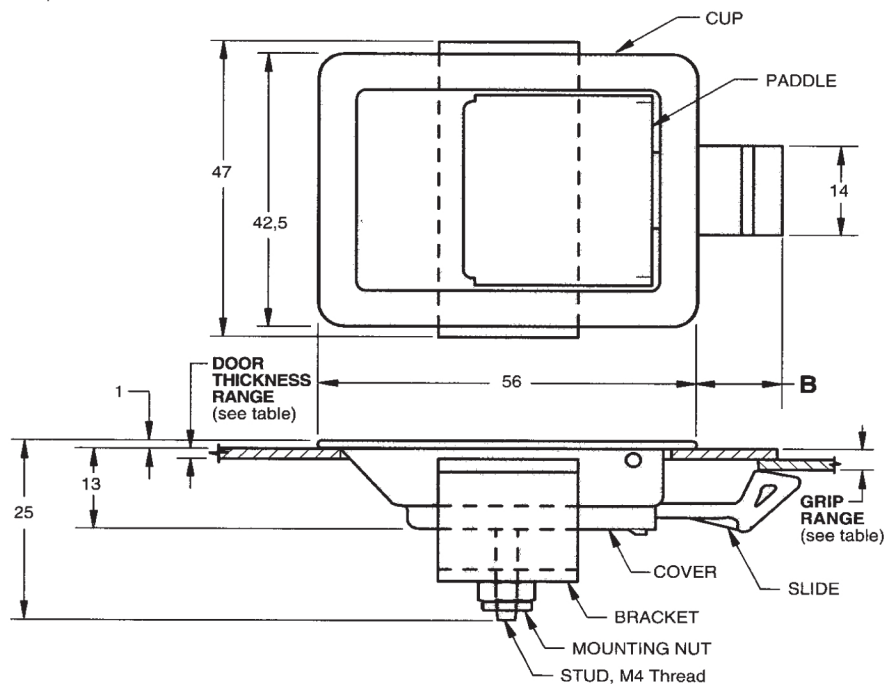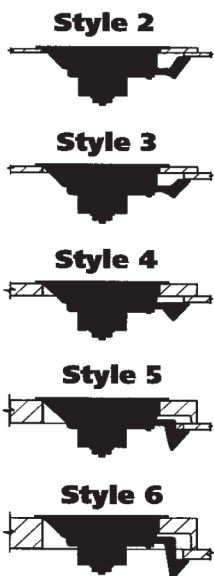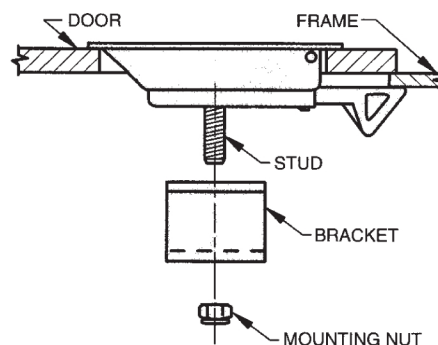

Grip Range		Part Number (Door Thickness Range)				Pawl	T	A		B
Min	Max.	3.7 Max	3.9 to 7.3	11.1 to 14.6	18.6 to 22	Style		Min	Max	
Brush Finish										
1.2	2.0	64-10-111-50	64-10-131-50	64-10-151-50	64-10-151-50	1	1.6	10.4	12.7	12.4
2.0	2.8	64-10-112-50	64-10-132-50	64-10-152-50	64-10-152-50	2	2.4	11.2	13.5	13.2
2.8	3.6	64-10-113-50	64-10-133-50	64-10-153-50	64-10-153-50	3	3.2	11.9	14.2	14.2
6.0	6.7	64-10-124-50	64-10-114-50	64-10-154-50	64-10-154-50	4	6.4			
12.3	13.1	64-10-125-50	64-10-135-50	64-10-115-50	64-10-115-50	5	7.1			
18.6	19.4	64-10-126-50	64-10-136-50	64-10-116-50	64-10-116-50	6	7.1			