


Flush-Head Type

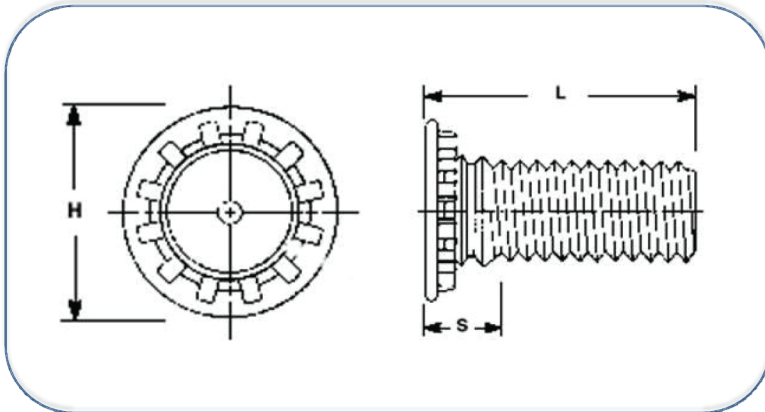

- Material:
Steel, Stainless Steel, Aluminium
- Finish:
Zinc plated, Natural, Clear Passivated

All dimension are in MM

Threads Size	Part Number			"L "											Min.	Hole Size	Max.hole			Min.Dist
	Steel	Stainless Steel	Aluminium	Length ± 0.40											Sheet	In Sheet	in mating	H	S	Hole C/L
				6	8	10	12	15	18	20	25	30	35	THK.	+0.08/-0	components	±0.4	(Max.)	To Edge	
M2 x 0.4	SFH-M2.5-XX	SFHS-M2.5-XX	SFHA-M2.5-XX	*	*	*	*	*	*					1	2.5	3.1	4.1	1.95	5.4	
M3 x 0.5	SFH-M3-XX	SFHS-M3-XX	SFHA-M3-XX	*	*	*	*	*	*	*	*			1	3	3.6	4.6	2.1	5.6	
M3.5 x 0.6	SFH-M3.5-XX	SFHS-M3.5-XX	SFHA-M3.5-XX	*	*	*	*	*	*	*	*	*		1	3.5	4.1	5.3	2.25	6.4	
M4 x 0.7	SFH-M4-XX	SFHS-M4-XX	SFHA-M4-XX	*	*	*	*	*	*	*	*	*	*	1	4	4.6	5.9	2.4	7.2	
M5 x 0.8	SFH-M5-XX	SFHS-M5-XX	SFHA-M5-XX		*	*	*	*	*	*	*	*	*	1	5	5.6	6.5	2.7	7.2	
M6 x 1	SFH-M6-XX	SFHS-M6-XX	SFHA-M6-XX			*	*	*	*	*	*	*	*	1.6	6	6.6	8.2	3	7.9	
M8 x 1.25	SFH-M8-XX	SFHS-M8-XX	SFHA-M8-XX				*	*	*	*	*	*	*	2.4	8	8.6	9.6	3.7	9.6	

How To Order:

XX = Standard Length For Standoff

If your require length is 6mm
Subtitute 03 for the XX portion of the basic part number
e.g. SFH-M3-06