




Self-Clinching Nuts

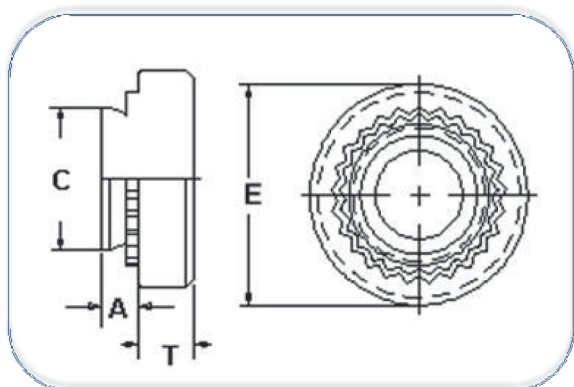

- Material:
Carbon Steel and Stainless steel application.
- Finish:
Zinc Plated and Clear Passivated

All dimension are in MM

Threads Size	Type		Shank No.	A (Shank) Max.	Sheet Thickness (Min.)	Hole Size In Sheet +0.08/-0	C Max.	E ±0.25	T ±0.25	Min.Dist Hole C/L To Edge (1)
	Fastener Material									
	Carbon Steel	Stainless Steel								

Thread Type M2

M2 x 0.4	SCS-M2-0	SCLS-M2-0	0	0.77	0.8~1	4.25	4.22	6.3	1.5	4.8
	SCS-M2-1	SCLS-M2-1	1	0.97	1					
	SCS-M2-2	SCLS-M2-2	2	1.38	1.4					

Thread Type M2.5

M2.5 x 0.45	SCS-M2.5-0	SCLS-M2.5-0	0	0.77	0.8~1	4.25	4.22	6.3	1.5	4.8
	SCS-M2.5-1	SCLS-M2.5-1	1	0.97	1					
	SCS-M2.5-2	SCLS-M2.5-2	2	1.38	1.4					

Thread Type M3

M3 x 0.5	SCS-M3-0	SCLS-M3-0	0	0.77	0.8~1	4.25	4.22	6.3	1.5	4.8
	SCS-M3-1	SCLS-M3-1	1	0.97	1					
	SCS-M3-2	SCLS-M3-2	2	1.38	1.4					

Thread Type M3.5

M3.5 x 0.6	SCS-M3.5-0	SCLS-M3.5-0	0	0.77	0.8~1	4.75	4.73	7.1	1.5	5.6
	SCS-M3.5-1	SCLS-M3.5-1	1	0.97	1					
	SCS-M3.5-2	SCLS-M3.5-2	2	1.38	1.4					

Thread Type M4

M4 x 0.7	SCS-M4-0	SCLS-M4-0	0	0.77	0.8~1	5.4	5.38	7.9	2	6.9
	SCS-M4-1	SCLS-M4-1	1	0.97	1					
	SCS-M4-2	SCLS-M4-2	2	1.38	1.4					

Thread Type M5

M5 x 0.8	SCS-M5-0	SCLS-M5-0	0	0.77	0.8~1	6.4	6.38	8.7	2	7.1
	SCS-M5-1	SCLS-M5-1	1	0.97	1					
	SCS-M5-2	SCLS-M5-2	2	1.38	1.4					

Thread Type M6

M6 x 1	SCS-M6-0	SCLS-M6-0	0	1.15	1.2	8.75	8.72	11.05	4.08	8.6
	SCS-M6-1	SCLS-M6-1	1	1.38	1					
	SCS-M6-2	SCLS-M6-2	2	2.21	2.3					

Thread Type M8

M8 x 1.25	SCS-M8-1	SCLS-M8-1	1	1.38	1.4	10.5	10.47	12.65	5.47	9.7
	SCS-M8-2	SCLS-M8-2	2	2.21	2					

Thread Type M10

M10 x 1.5	SCS-M10-1	SCLS-M10-1	1	2.21	2.31	14	13.97	17.35	7.48	13.5
	SCS-M10-2	SCLS-M10-2	2	3.05	3.18					